



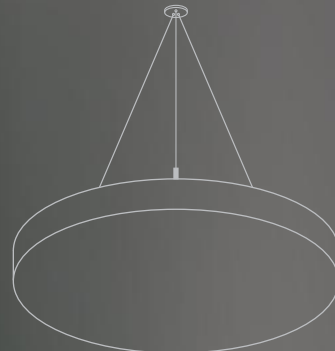



LUMINAR LIGHTING CONTROLS
Architectural Lighting Solutions



PROFILE

CATALOGUE

2023-24



Powered by

R **RANGE-LITE**[®]
Original

PROFILE



Luminar Lighting Controls is one of the Leading LED Lighting Solutions provider, with one of the best talent pools of LED Lighting Industry experts and having a vast experience of around 30 plus years. Our Factory of 25K square feet is Located in Mumbai - Vasai, where we have our own Manufacturing Unit, Quality Facility, R&D Centre & Warehousing etc. Our Company is engaged in designing and manufacturing energy efficient and durable LED luminaires for Homes, Modern work spaces, Retail spaces, Manufacturing facilities, Roadways, Railways, Airports and City beautification projects.

Our company forte is into Linea lighting & we also have our own range of Indoor & Outdoor conventional LED lighting products as well as architectural products.

We have around 500 retail stores lighting experience of retrofitting as well as developing new Stores, Retrofitting of Warehouses, Airports, Food Courts, Pharma Industries, to name a few.

Our Lighting Solutions :

Using our extensive expertise, we are able to provide advice and guidance in a project that, We can also offers enhanced design scope & Customized design. We develop high-quality Products semiconductor-based & COB based . We explore digital innovations in order to be able to provide smart connected lighting solutions. Our products today already feature technologies of tomorrow.

Factory View :

Our Infrastructure is spread over an area of 25000 square feet and is well equipped with a manufacturing unit, in-house design unit as well as advance research and development wing and Quality Dept..(In Set up Mode)

Our diligent and proficient workforce is capable of understanding client's requirement which allows them to cater to the same in best possible manner.

Manufacturing Facilites :

LLC has total 2 production Unit located in house Area around 1200 Sq. feet each with Fully AC and Dust Proof Environment . (In Set up mode)

Product Details Which Manufacture & Assemble :

Led Down Light / Track Light / Zoom Light




Surface / Suspended Cylindrical Downlight / Architectural Downlight

Linear Aluminum Profile (Formation & Non Formation Design)

Led 2x2 Panels Edge-lit & Back-lit

Led Decorative & Others

Magnetic Fixtures of 15mm, 25mm & 35mm



Optional Chip Brand

LLC choose brand original light source, make sure that the color tolerance < 3 color performance, pure light color, high color rendering, a uniform light is downy, completely simulate natural light. In the process of production strictly detection, quality control, Ensure that each light source are excellent, consistent, sustained and stable color expressive force.



5000K

4000K

3000K

2700K

Color Temperature

Variety of light color option, meet different lighting environment needs.

Warm White / 2700K / 3000K)

Suitable for low intensity of illumination requirements of household, hotels, clubs, restaurants, exclusive stores etc.

Neutral white (4000K)

Suitable for higher demand illumination chain stores, commercial complexes, office buildings and other places

Cool white (5000K to 6000K)

Suitable for higher demand illumination schools, hospitals, jewelry stores, jade shops, roads and other places

I N D E X

FLARE SERIES

Pg 01-11



Flare-0709
Pg. 02



Flare-0709
Pg. 03



Flare-2208
Pg. 04



Flare-1808
Pg. 05



Flare-1616
Pg. 06



Flare-1818
Pg. 07



Flare-1714
Pg. 08



Flare-2214
Pg. 09



Flare-Z-Linea
Pg. 10



Flare-Up-Down
Pg. 11

SIVIK SERIES

Pg 12-15



Sivik-2825
Pg. 13



Sivik-3525
Pg. 14



Sivik-2575
Pg. 15

GLEAM SERIES

Pg 16-20



Gleam-3530
Pg. 17



Gleam-4530
Pg. 18



Gleam-3570
Pg. 19



Gleam-3580
Pg. 20

ELEGANCE SERIES

Pg 21-27



Elegance-5235
Pg. 22



Elegance-6535
Pg. 23



Elegance-5275
Pg. 24



Elegance-5275
Pg. 25



Elegance-5275
Pg. 26



Elegance-5686
Pg. 27

I N D E X

RADIANCE SERIES

Pg 28-31



Radiance-7535
Pg. 29



Radiance-7575
Pg. 30



Radiance-9035
Pg. 31

GLINT SERIES

Pg 32-38



Glint-3530 Laser
Pg. 33



Glint-4530 Laser
Pg. 35



Glint-3580 Laser
Pg. 37

I-PANEL SERIES

Pg 39-41



Edge-lit Panel
Pg. 40



Back-lit Panel
Pg. 41

CERO SERIES

Pg 42-44



Cero SP
Pg. 43



Cero RC
Pg. 44

LUNA SERIES

Pg 45-48



Luna SP
Pg. 46



Luna SF
Pg. 47



Luna RC
Pg. 48

I N D E X

CUSTOMISED CURVY PROFILE SERIES

Pg 49-52



Curvy RC-5070
Pg. 50



Curvy RC-6535
Pg. 51



Curvy RC-7550
Pg. 52

CUSTOMISED LINEARS

Pg 53-58



Seslatero
Pg. 54



Plac
Pg. 55



Petryal
Pg. 56



Makona
Pg. 57






Upsilon
Pg. 58









FLARE SERIES

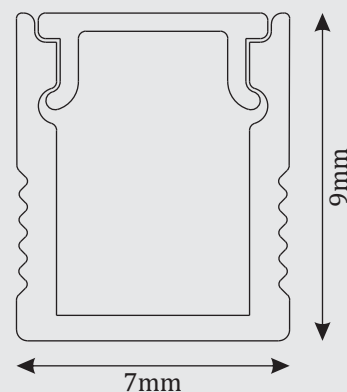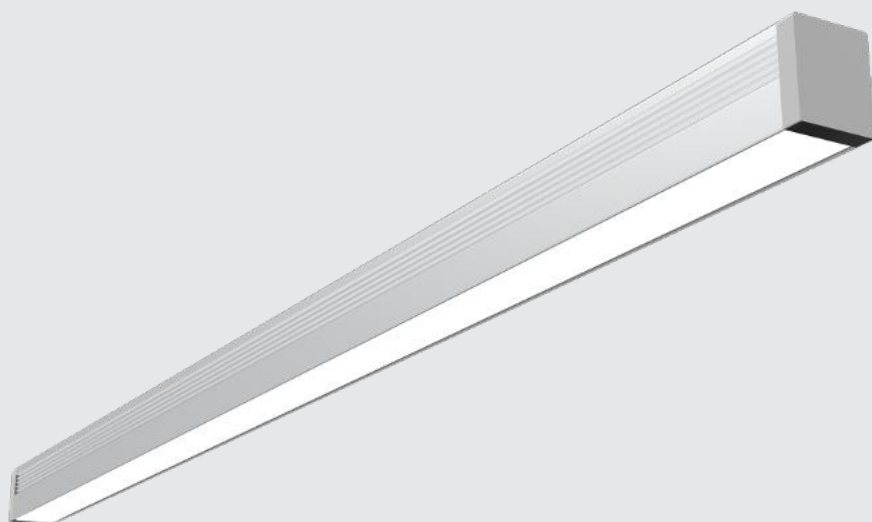

Body Color Available



White



Anodized



Black

CCT



3000K



4000K




5700K




Technical Specification

Housing	: Aluminium Extrusion (Powder Coated)
Diffuser	: Polycarbonate (PC)
LED	: Bridgelux 2835 SMD
Driver	: Osram / Meanwell - 24V DC
Wattage	: 10w/meter
Mounting Type	: Surface
Dimensions	: • Cutout : 7mm • Width : 7mm • Height : 9mm
Option Available	: • Customize length • Dimmable Dali & Analogue • Constant current led and driver • Sensor


Accessories

Connectors & Mounting Clamp

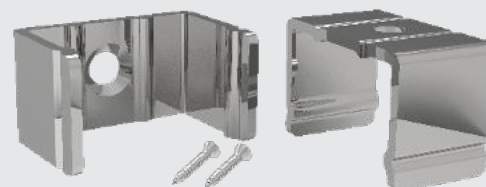


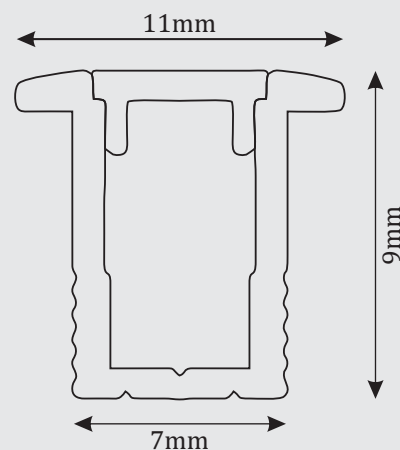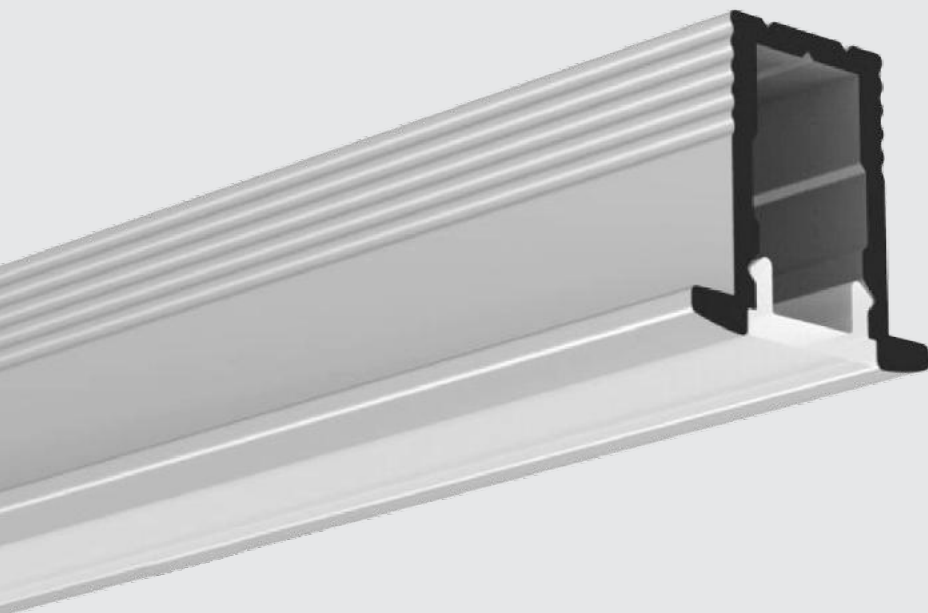

Body Color Available



White



Anodized



Black

CCT



3000K



4000K



5700K




Technical Specification

Housing	: Aluminium Extrusion (Powder Coated)
Diffuser	: Polycarbonate (PC)
LED	: Bridgelux 2835 SMD
Driver	: Osram / Meanwell - 24V DC
Wattage	: 10w/meter
Mounting Type	: Recessed
Dimensions	: • Cutout : 7mm • Width : 11mm • Height : 9mm
Option Available	: • Customize length • Dimmable Dali & Analogue • Constant current led and driver • Sensor


Accessories

Connectors & Mounting Clamp




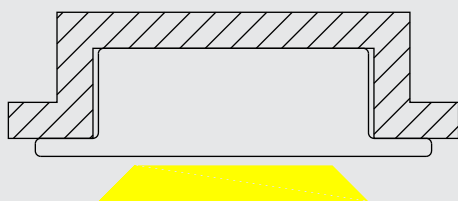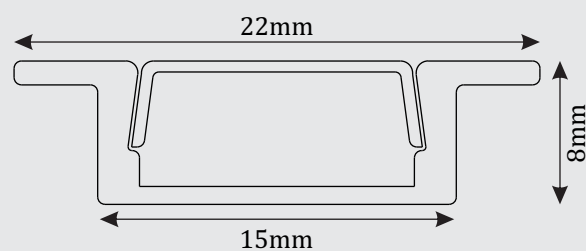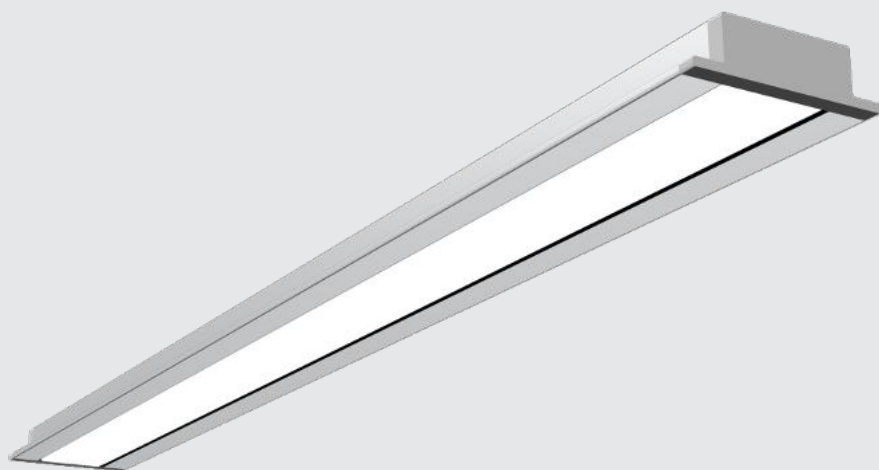


Body Color Available



White



Anodized



Black

CCT



3000K



4000K



5700K

Technical Specification

Housing	: Aluminium Extrusion (Powder Coated)
Diffuser	: Polycarbonate (PC)
LED	: Bridgelux 2835 SMD
Driver	: Osram / Meanwell - 24V DC
Wattage	: 10w/meter
Mounting Type	: Recessed
Dimensions	: • Cutout : 15mm • Width : 22mm • Height : 08mm
Option Available	: • Customize length • Dimmable Dali & Analogue • Constant current led and driver • Sensor

Accessories




Connectors & Mounting Clamp




Flare-1808




LUMINAR LIGHTING CONTROLS
Architectural Lighting Solutions

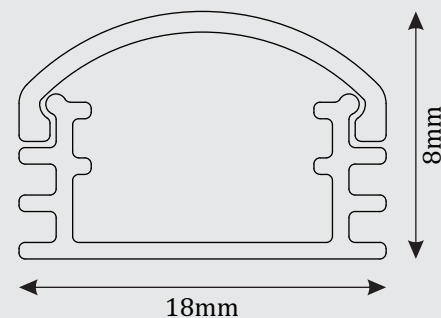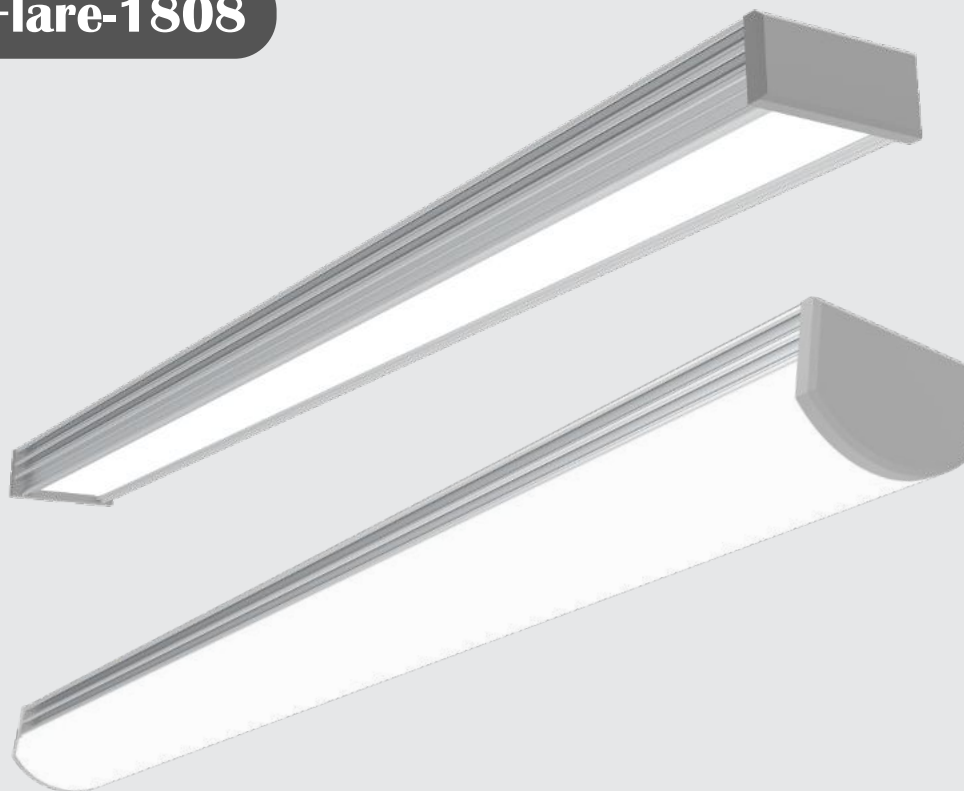


Body Color Available



White



Anodized



Black

CCT



3000K



4000K



5700K




Technical Specification

Housing	: Aluminium Extrusion (Powder Coated)
Diffuser	: Polycarbonate (PC)
LED	: Bridgelux 2835 SMD
Driver	: Osram / Meanwell - 24V DC
Wattage	: 15w/meter
Mounting Type	: Surface
Dimensions	: • Cutout : 18mm • Width : 18mm • Height : 08mm
Option Available	: • Customize length • Dimmable Dali & Analogue • Constant current led and driver • Sensor


Accessories

Connectors & Mounting Clamp




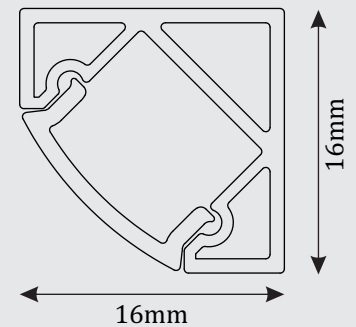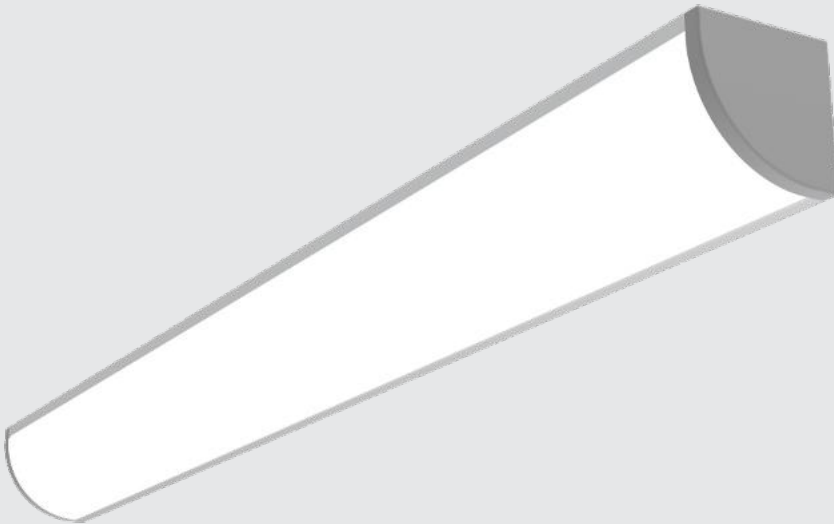


Body Color Available



White



Anodized



Black

CCT



3000K



4000K




5700K




Technical Specification

Housing	: Aluminium Extrusion (Powder Coated)
Diffuser	: Polycarbonate (PC)
LED	: Bridgelux 2835 SMD
Driver	: Osram / Meanwell - 24V DC
Wattage	: 15w/meter
Mounting Type	: Corner Surface
Dimensions	: • Cutout : 16mm • Width : 16mm • Height : 16mm
Option Available	: • Customize length • Dimmable Dali & Analogue • Constant current led and driver • Sensor


Accessories

Connectors & Mounting Clamp

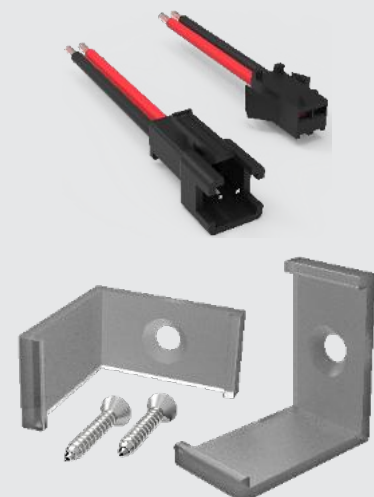


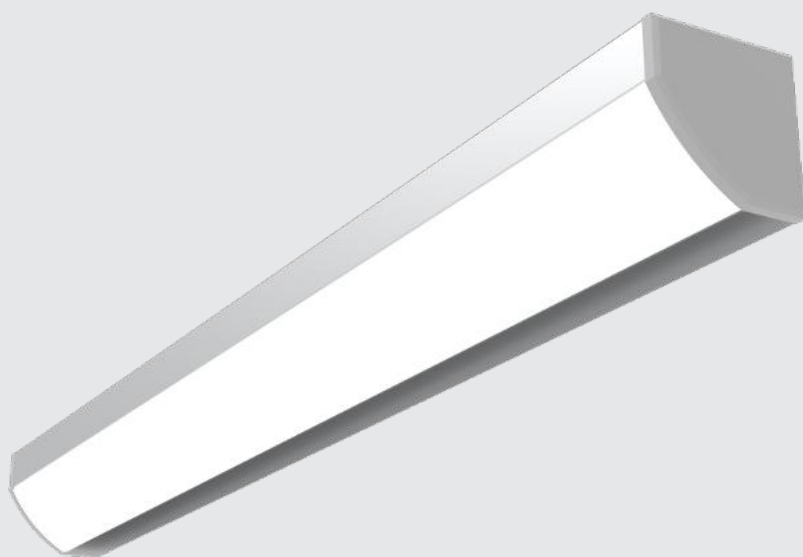

Body Color Available



White



Anodized



Black

CCT



3000K



4000K




5700K



Technical Specification

Housing	: Aluminium Extrusion (Powder Coated)
Diffuser	: Polycarbonate (PC)
LED	: Bridgelux 2835 SMD
Driver	: Osram / Meanwell - 24V DC
Wattage	: 15w/meter
Mounting Type	: Corner Surface
Dimensions	: • Cutout : 18mm • Width : 18mm • Height : 18mm
Option Available	: • Customize length • Dimmable Dali & Analogue • Constant current led and driver • Sensor


Accessories

Connectors & Mounting Clamp

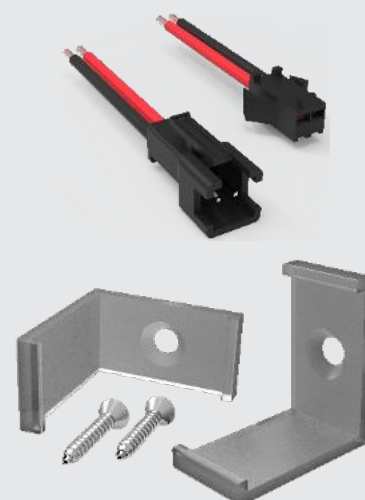


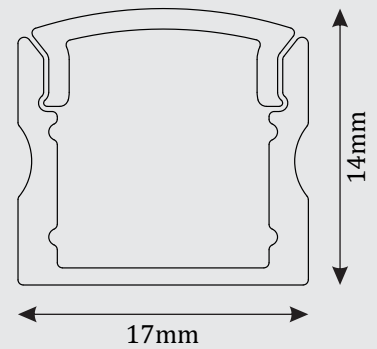


Body Color Available



White



Anodized



Black

CCT



3000K



4000K




5700K




Technical Specification

Housing	: Aluminium Extrusion (Powder Coated)
Diffuser	: Polycarbonate (PC)
LED	: Bridgelux 2835 SMD
Driver	: Osram / Meanwell - 24V DC
Wattage	: 15w/meter
Mounting Type	: Surface
Dimensions	: • Cutout : 17mm • Width : 17mm • Height : 14mm
Option Available	: • Customize length • Dimmable Dali & Analogue • Constant current led and driver • Sensor


Accessories

Connectors & Mounting Clamp

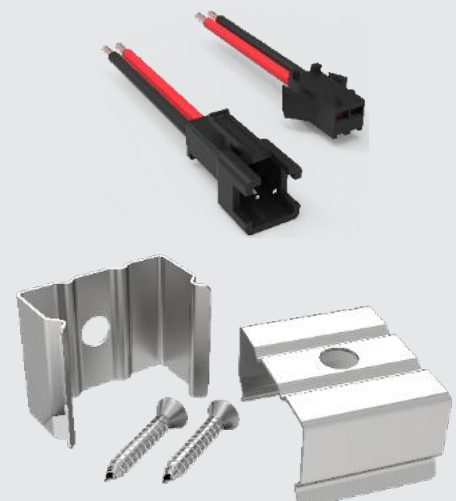


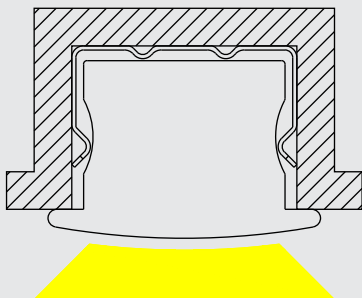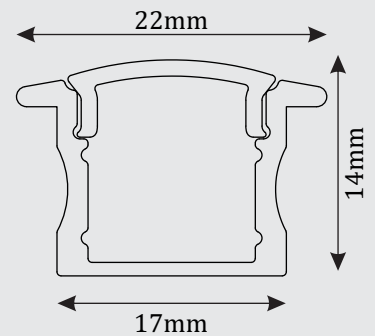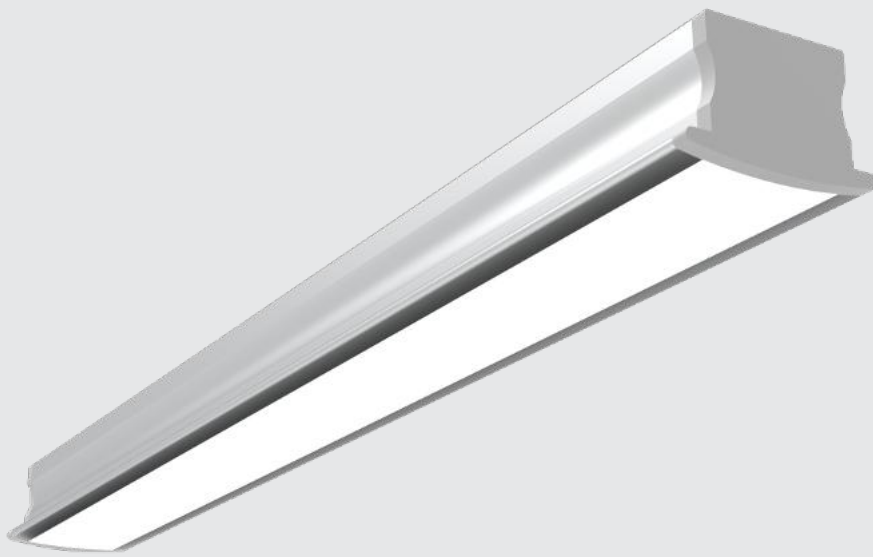


Body Color Available



White



Anodized



Black

CCT



3000K



4000K




5700K




Technical Specification

Housing	: Aluminium Extrusion (Powder Coated)
Diffuser	: Polycarbonate (PC)
LED	: Bridgelux 2835 SMD
Driver	: Osram / Meanwell - 24V DC
Wattage	: 15w/meter
Mounting Type	: Recessed & Concealed
Dimensions	: • Cutout : 17mm • Width : 22mm • Height : 14mm
Option Available	: • Customize length • Dimmable Dali & Analogue • Constant current led and driver • Sensor


Accessories

Connectors & Mounting Clamp

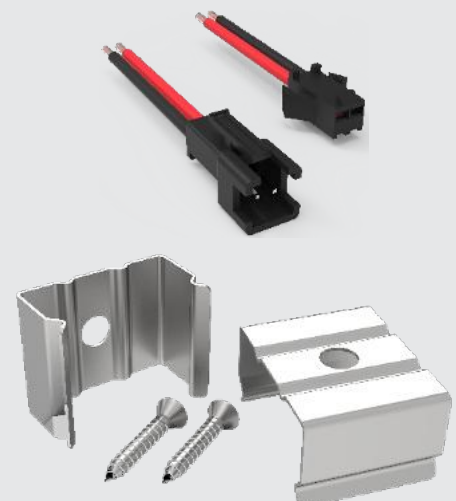


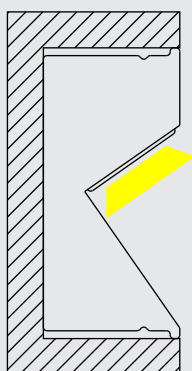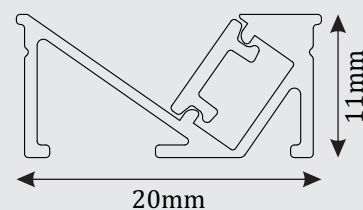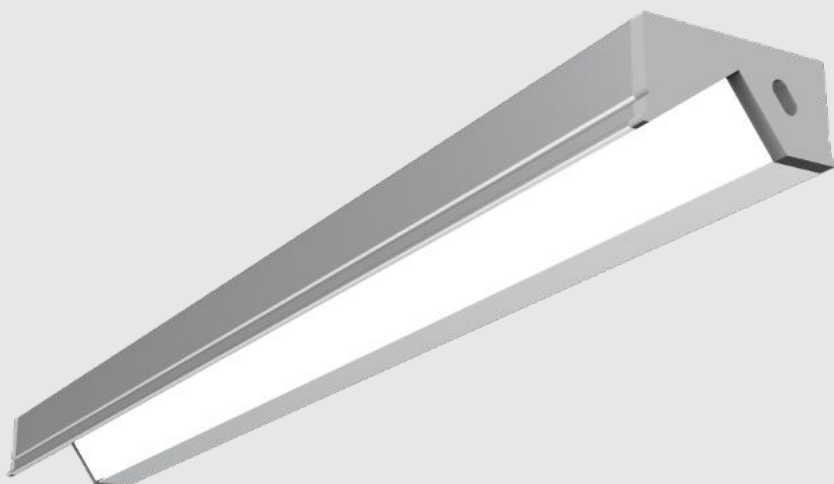


Body Color Available



White



Anodized



Black

CCT



3000K



4000K



5700K




Technical Specification

Housing	: Aluminium Extrusion (Powder Coated)
Diffuser	: Polycarbonate (PC)
LED	: LED Strip (5mm) 2835 SMD
Driver	: Osram / Meanwell - 24V DC
Wattage	: 10w/meter
Mounting Type	: Surface
Dimensions	: • Cutout : 17mm • Width : 20mm • Height : 11mm
Option Available	: • Customize length • Dimmable Dali & Analogue • Constant current led and driver • Sensor


Accessories

Connectors & Mounting Clamp




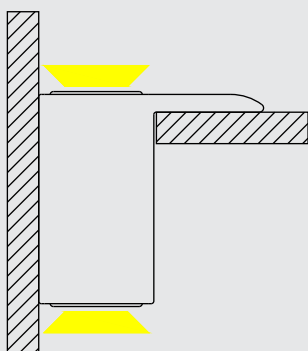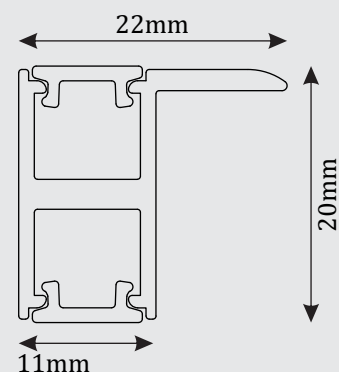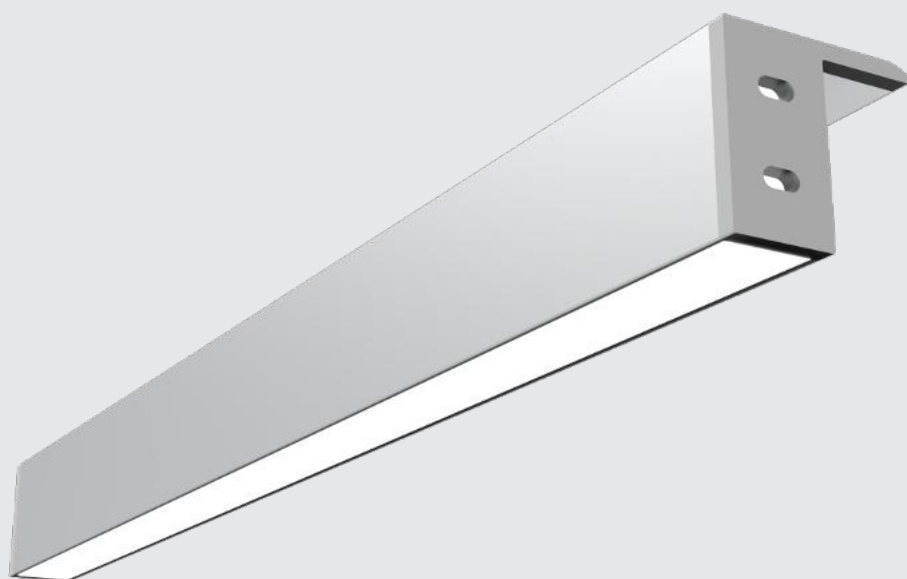


Body Color Available



White



Anodized



Black

CCT



3000K



4000K



5700K

Technical Specification

Housing	: Aluminium Extrusion (Powder Coated)
Diffuser	: Polycarbonate (PC)
LED	: Bridgelux 2835 SMD
Driver	: Osram / Meanwell - 24V DC
Wattage	: 15w/meter
Mounting Type	: Surface
Dimensions	: • Cutout : 11mm • Width : 22mm • Height : 20mm
Option Available	: • Customize length • Dimmable Dali & Analogue • Constant current led and driver • Sensor




Accessories

Connectors & Mounting Clamp







SIVIK SERIES

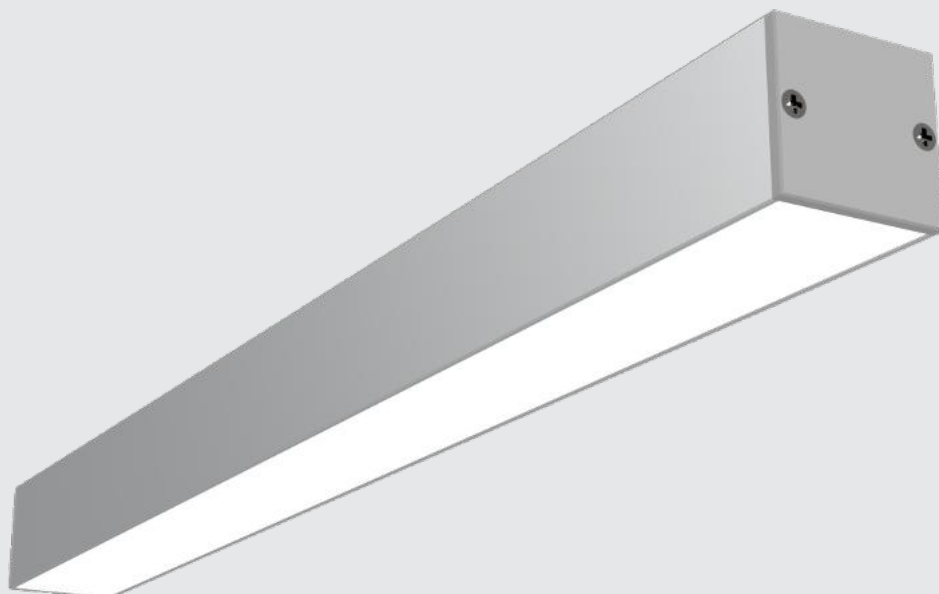


Body Color Available



White



Grey



Black

CCT



3000K



4000K






5700K


Technical Specification

Housing	: Aluminium Extrusion (Powder Coated)
Diffuser	: PMMA
LED	: Bridgelux 2835 SMD
Driver	: Osram / Fulham - 36V DC
Wattage	: 15w/meter
Lumens	: 80 Lumens/Watt
Mounting Type	: Recessed & Concealed
Dimensions	: • Width : 28mm • Height : 25mm
Option Available	: • Customize length • Dimmable Dali & Analogue • Constant current led and driver


Accessories Spring Clamp

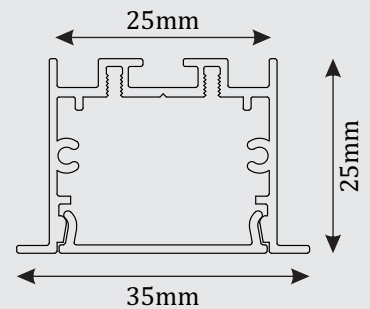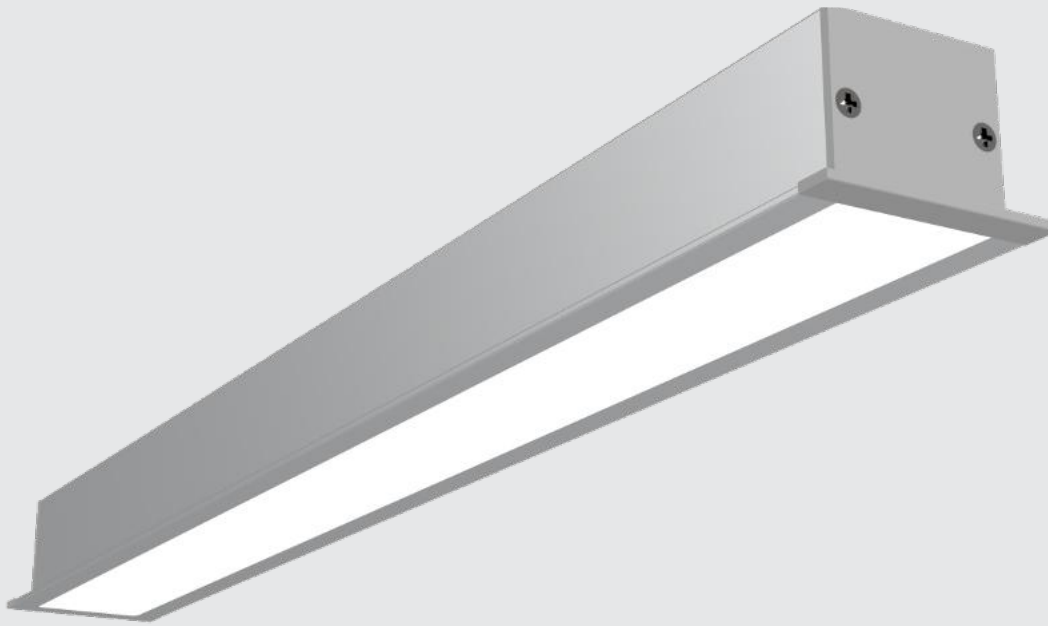


Body Color Available



White



Grey



Black

CCT



3000K



4000K




5700K

Technical Specification

Housing	: Aluminium Extrusion (Powder Coated)
Diffuser	: PMMA
LED	: Bridgelux 2835 SMD
Driver	: Osram / Fulham - 36V DC
Wattage	: 15w/meter
Lumens	: 80 Lumens/Watt
Mounting Type	: Recessed & Concealed
Dimensions	: • Cutout : 25mm • Width : 35mm • Height : 25mm
Option Available	: • Customize length • Dimmable Dali & Analogue • Constant current led and driver




Accessories Spring Clamp

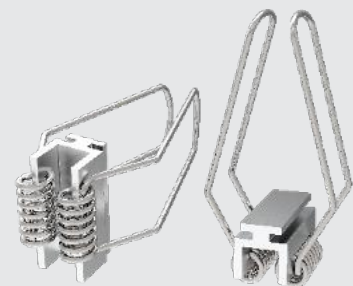


Sivik-2575




LUMINAR LIGHTING CONTROLS
Architectural Lighting Solutions

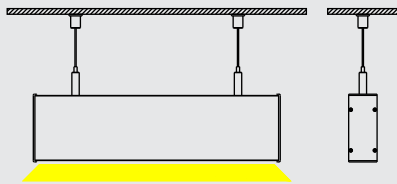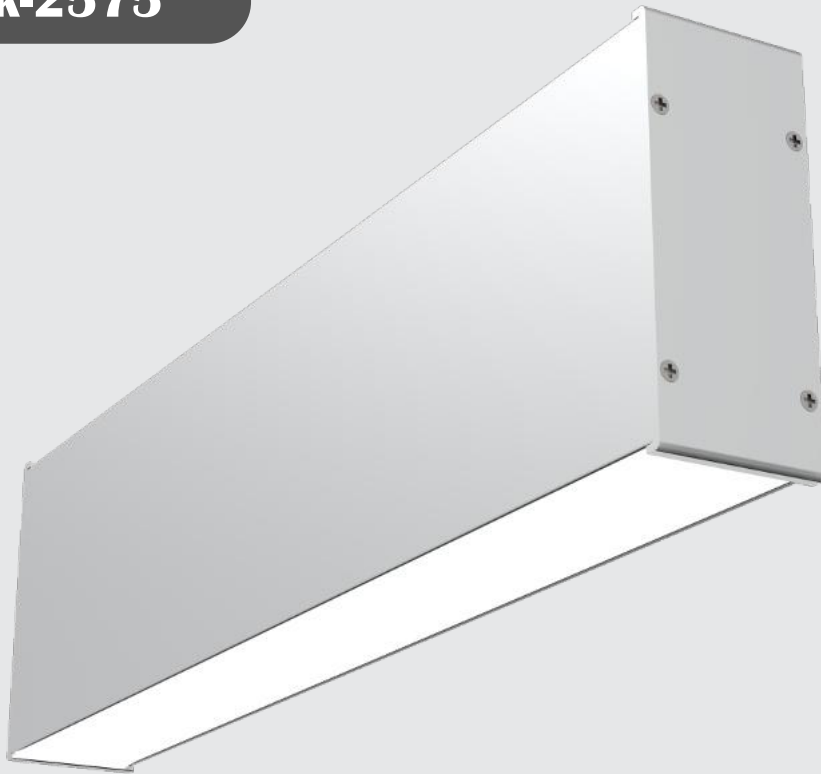


Body Color Available



White



Grey



Black

CCT



3000K



4000K



5700K

Technical Specification

Housing	: Aluminium Extrusion (Powder Coated)
Diffuser	: PMMA
LED	: Bridgelux 2835 SMD
Driver	: Osram / Fulham - 36V DC
Wattage	: 24w/meter
Lumens	: 100 Lumens/Watt
Mounting Type	: (Suspended and Suspended updown)
Dimensions	: • Width : 25mm • Height : 75mm
Option Available	: • Customize length • Dimmable Dali & Analogue • Constant current led and driver

Accessories

Hanging








GLEAM SERIES


Gleam-3530




LUMINAR LIGHTING CONTROLS
Architectural Lighting Solutions

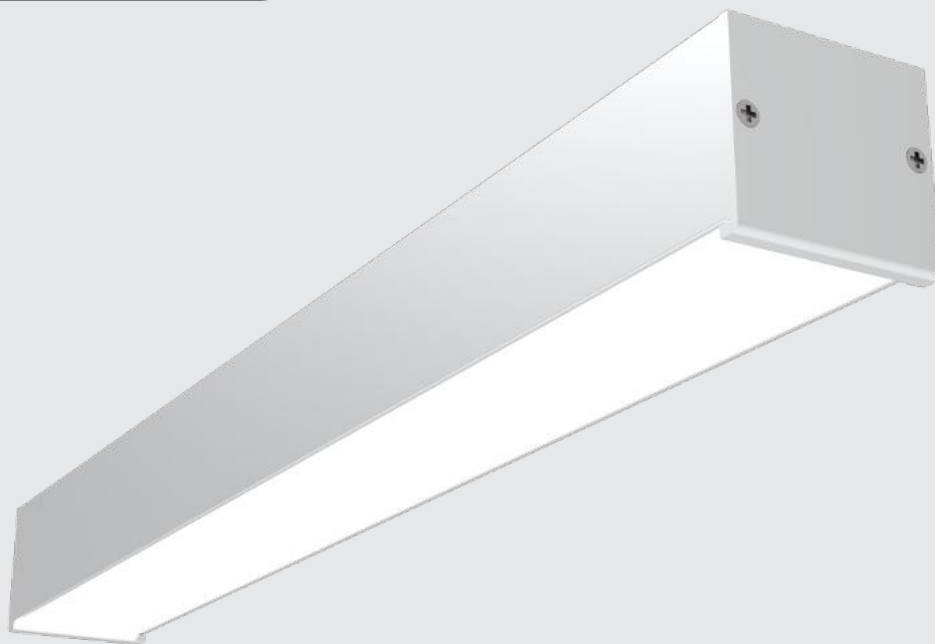


Body Color Available



White



Grey



Black

CCT



3000K




4000K




5700K

Technical Specification


Housing	: Aluminium Extrusion (Powder Coated)
Diffuser	: PMMA
LED	: Bridgelux 2835 SMD
Driver	: Osram / Fulham - 36V DC
Wattage	: 24w/meter
Lumens	: 100 Lumens/Watt
Mounting Type	: Surface
Dimensions	: • Cutout : 35mm • Width : 35mm • Height : 30mm
Option Available	: • Customize length • Dimmable Dali & Analogue • Constant current led and driver

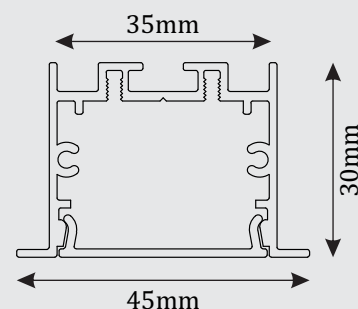

Body Color Available



White



Grey



Black

CCT



3000K



4000K



5700K

Technical Specification

Housing	: Aluminium Extrusion (Powder Coated)
Diffuser	: PMMA
LED	: Bridgelux 2835 SMD
Driver	: Osram / Fulham - 36V DC
Wattage	: 24w/meter
Lumens	: 100 Lumens/Watt
Mounting Type	: Recessed
Dimensions	: • Cutout : 35mm • Width : 45mm • Height : 30mm
Option Available	: • Customize length • Dimmable Dali & Analogue • Constant current led and driver

Accessories



C-Clamp




Gleam-3570




LUMINAR LIGHTING CONTROLS
Architectural Lighting Solutions

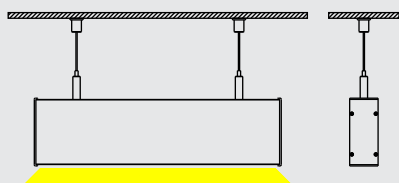


Body Color Available



White



Grey



Black

CCT



3000K



4000K



5700K

Technical Specification

Housing	: Aluminium Extrusion (Powder Coated)
Diffuser	: PMMA
LED	: Bridgelux 2835 SMD
Driver	: Osram / Fulham - 36V DC
Wattage	: 24w/meter
Lumens	: 100 Lumens/Watt
Mounting Type	: (Suspended and Suspended updown)
Dimensions	: • Width : 35mm • Height : 70mm
Option Available	: • Customize length • Dimmable Dali & Analogue • Constant current led and driver

Accessories



Hanging




Gleam-3580




LUMINAR LIGHTING CONTROLS
Architectural Lighting Solutions

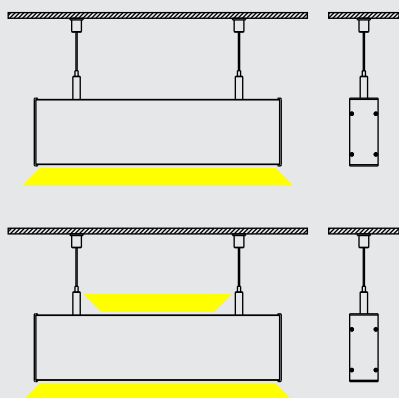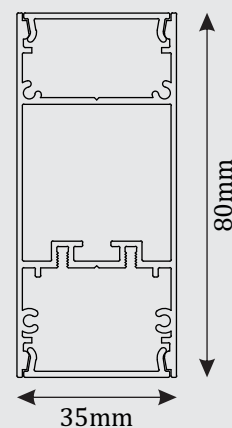


Body Color Available



White



Grey



Black

CCT



3000K



4000K



5700K

Technical Specification

Housing	: Aluminium Extrusion (Powder Coated)
Diffuser	: PMMA
LED	: Bridgelux 2835 SMD
Driver	: Osram / Fulham - 36V DC
Wattage	: 24w/meter
Lumens	: 100 Lumens/Watt
Mounting Type	: (Suspended and Suspended updown)
Dimensions	: • Width : 35mm • Height : 80mm
Option Available	: • Customize length • Dimmable Dali & Analogue • Constant current led and driver




Accessories

Hanging







ELEGANCE SERIES

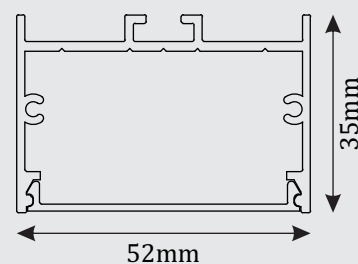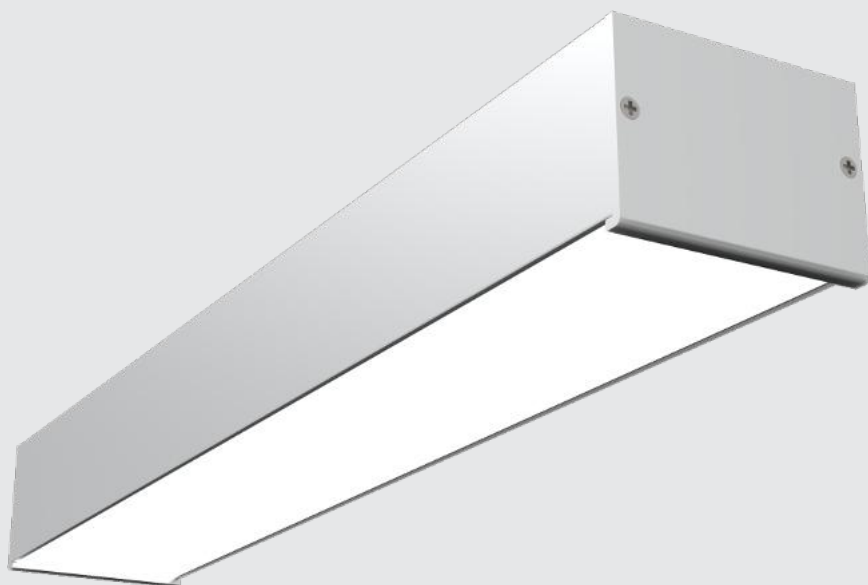


Body Color Available



White



Grey



Black

CCT



3000K





4000K




5700K

Technical Specification


Housing	: Aluminium Extrusion (Powder Coated)
Diffuser	: PMMA
LED	: Bridgelux 2835 SMD
Driver	: Osram / Fulham - 36V DC
Wattage	: 24w/meter
Lumens	: 100 Lumens/Watt
Mounting Type	: Surface
Dimensions	: • Cutout : 52mm • Width : 52mm • Height : 35mm
Option Available	: • Customize length • Dimmable Dali & Analogue • Constant current led and driver

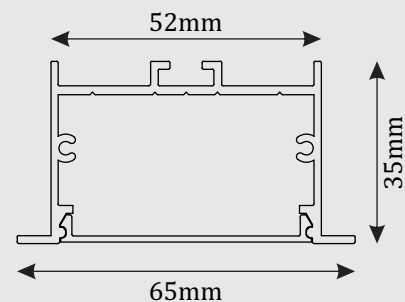


Body Color Available



White



Grey



Black

CCT



3000K



4000K



5700K

Technical Specification

Housing	: Aluminium Extrusion (Powder Coated)
Diffuser	: PMMA
LED	: Bridgelux 2835 SMD
Driver	: Osram / Fulham - 36V DC
Wattage	: 24w/meter
Lumens	: 100 Lumens/Watt
Mounting Type	: Recessed
Dimensions	: • Cutout : 52mm • Width : 65mm • Height : 35mm
Option Available	: • Customize length • Dimmable Dali & Analogue • Constant current led and driver

Accessories




C-Clamp




Elegance-5275




LUMINAR LIGHTING CONTROLS
Architectural Lighting Solutions

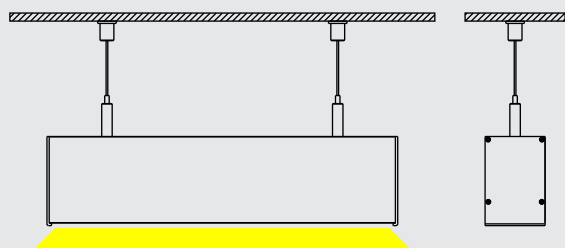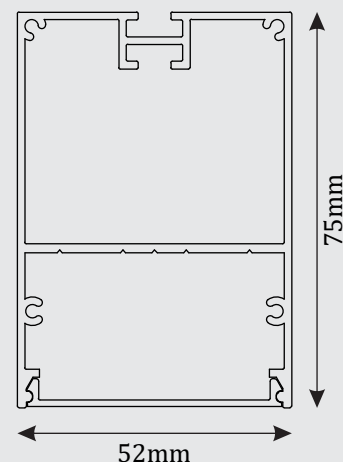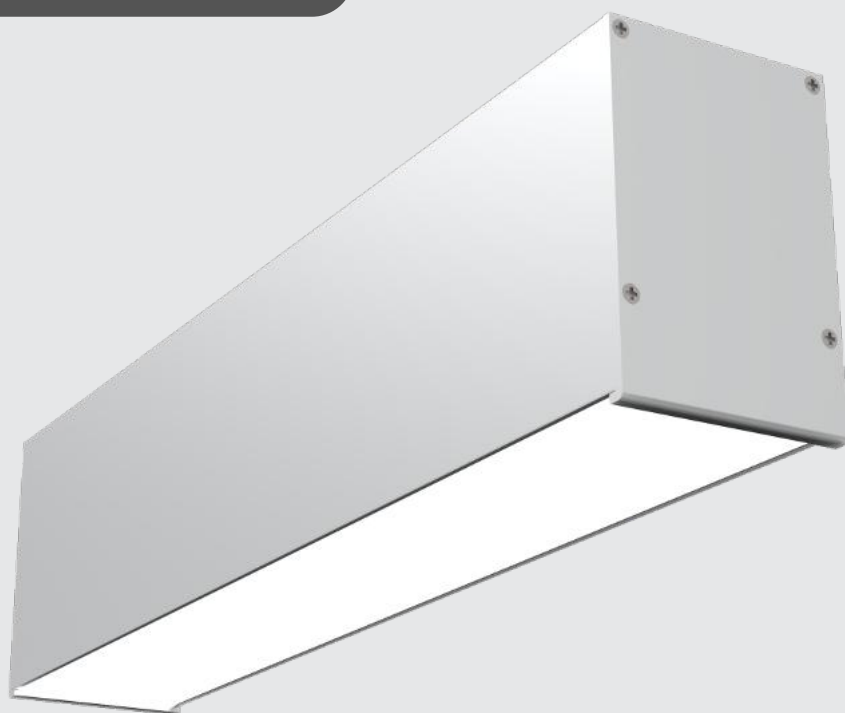


Body Color Available



White



Grey



Black

CCT



3000K



4000K



5700K

Technical Specification

Housing	: Aluminium Extrusion (Powder Coated)
Diffuser	: PMMA
LED	: Bridgelux 2835 SMD
Driver	: Osram / Fulham - 36V DC
Wattage	: 24w/meter
Lumens	: 100 Lumens/Watt
Mounting Type	: Suspended
Dimensions	: • Width : 52mm • Height : 75mm
Option Available	: • Customize length • Dimmable Dali & Analogue • Constant current led and driver

Accessories

Hanging





Elegance-5275


Screwless - UGR <19




LUMINAR LIGHTING CONTROLS
Architectural Lighting Solutions

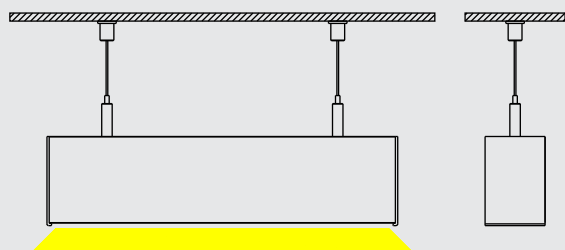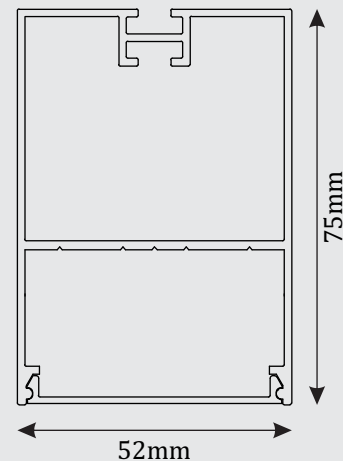


Body Color Available



White



Grey



Black

CCT



3000K



4000K




5700K

Technical Specification

Housing	: Aluminium Extrusion (Powder Coated)
Diffuser	: PMMA
LED	: Bridgelux 2835 SMD
Driver	: Osram / Fulham - 36V DC
Wattage	: 24w/meter
Lumens	: 100 Lumens/Watt
Mounting Type	: Suspended
Dimensions	: • Width : 52mm • Height : 75mm
Option Available	: • Customize length • Dimmable Dali & Analogue • Constant current led and driver

Accessories

Hanging






Prismatic Diffuser - UGR-19
(with film thickness 0.2mm)

Elegance-5275


Screwless




LUMINAR LIGHTING CONTROLS
Architectural Lighting Solutions

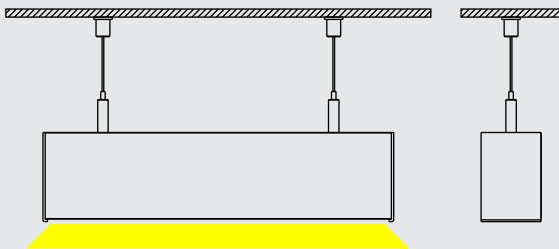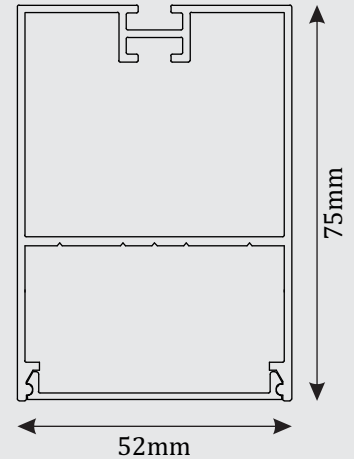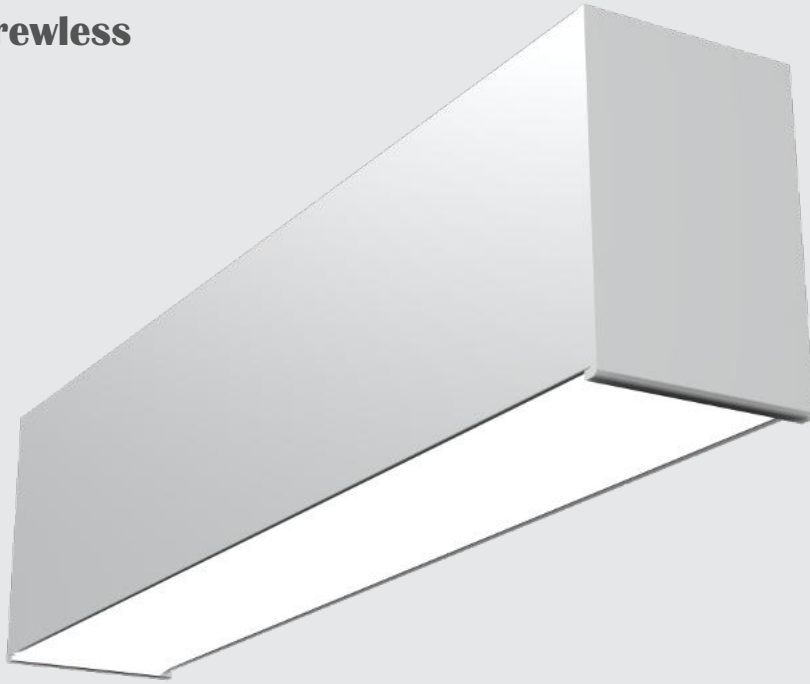


Body Color Available



White



Grey



Black

CCT



3000K



4000K



5700K



Technical Specification

Housing	: Aluminium Extrusion (Powder Coated)
Diffuser	: PMMA
LED	: Bridgelux 2835 SMD
Driver	: Osram / Fulham - 36V DC
Wattage	: 24w/meter
Lumens	: 100 Lumens/Watt
Mounting Type	: Suspended
Dimensions	: • Width : 52mm • Height : 75mm
Option Available	: • Customize length • Dimmable Dali & Analogue • Constant current led and driver


Accessories

Hanging




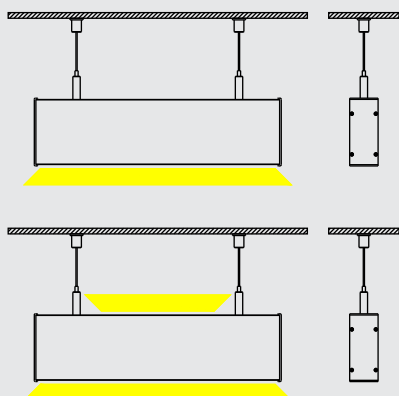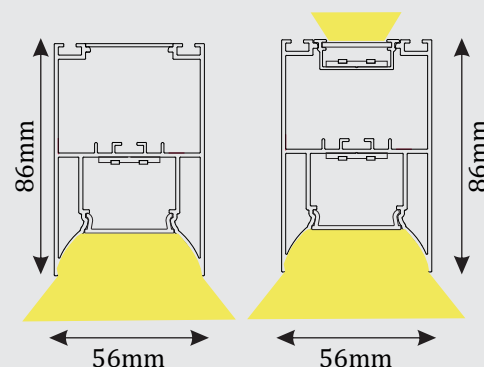


Body Color Available



White



Grey



Black

CCT



3000K



4000K



5700K

Technical Specification

Housing	: Aluminium Extrusion (Powder Coated)
Diffuser	: PMMA
LED	: Bridgelux 2835 SMD
Driver	: Osram / Fulham - 36V DC
Wattage	: 24w/meter
Lumens	: 90 Lumens/Watt
Mounting Type	: (Suspended and Suspended updown)
Dimensions	: • Width : 56mm • Height : 86mm
Option Available	: • Customize length • Dimmable Dali & Analogue • Constant current led and driver

Accessories

Hanging







RADIANCE SERIES


Radiance-7535




LUMINAR LIGHTING CONTROLS
Architectural Lighting Solutions

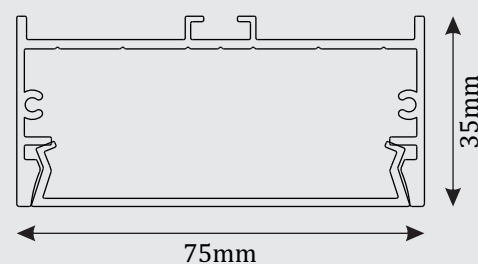


Body Color Available



White



Grey



Black

CCT



3000K



4000K



5700K




Technical Specification

Housing	: Aluminium Extrusion (Powder Coated)
Diffuser	: PMMA
LED	: Bridgelux 2835 SMD
Driver	: Osram / Fulham - 36V DC
Wattage	: 24w/meter
Lumens	: 100 Lumens/Watt
Mounting Type	: Surface
Dimensions	: • Cutout : 75mm • Width : 75mm • Height : 35mm
Option Available	: • Customize length • Dimmable Dali & Analogue • Constant current led and driver


Radiance-7575




LUMINAR LIGHTING CONTROLS
Architectural Lighting Solutions

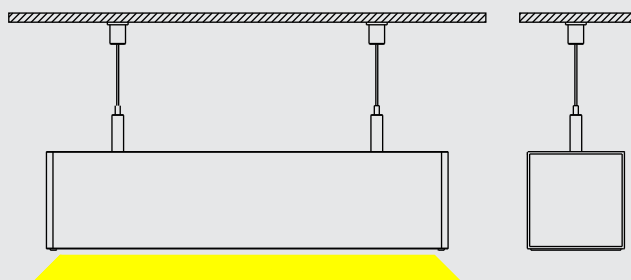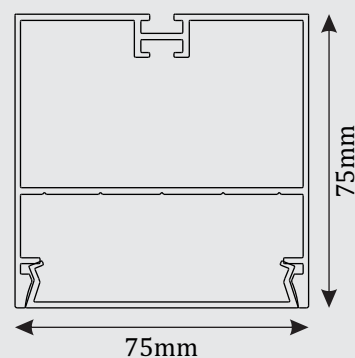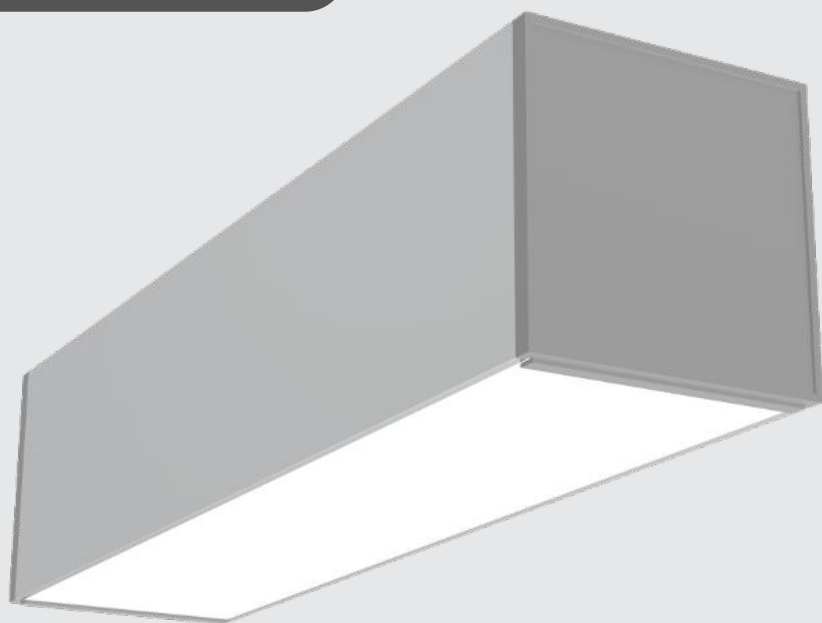


Body Color Available



White



Grey



Black

CCT



3000K



4000K



5700K



Technical Specification

Housing	: Aluminium Extrusion (Powder Coated)
Diffuser	: PMMA
LED	: Bridgelux 2835 SMD
Driver	: Osram / Fulham - 36V DC
Wattage	: 24w/meter
Lumens	: 100 Lumens/Watt
Mounting Type	: Hanging
Dimensions	: • Width : 75mm • Height : 75mm
Option Available	: • Customize length • Dimmable Dali & Analogue • Constant current led and driver


Accessories

Hanging




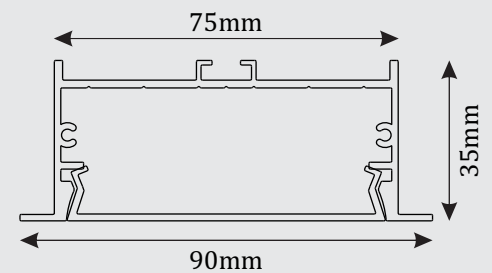


Body Color Available



White



Grey



Black

CCT



3000K



4000K



5700K

Technical Specification

Housing	: Aluminium Extrusion (Powder Coated)
Diffuser	: PMMA
LED	: Bridgelux 2835 SMD
Driver	: Osram / Fulham - 36V DC
Wattage	: 24w/meter
Lumens	: 100 Lumens/Watt
Mounting Type	: Recessed / Concealed
Dimensions	: • Cutout : 75mm • Width : 90mm • Height : 35mm
Option Available	: • Customize length • Dimmable Dali & Analogue • Constant current led and driver

Accessories

C-Clamp







GLINT SERIES


Glint-3530 Laser




LUMINAR LIGHTING CONTROLS
Architectural Lighting Solutions

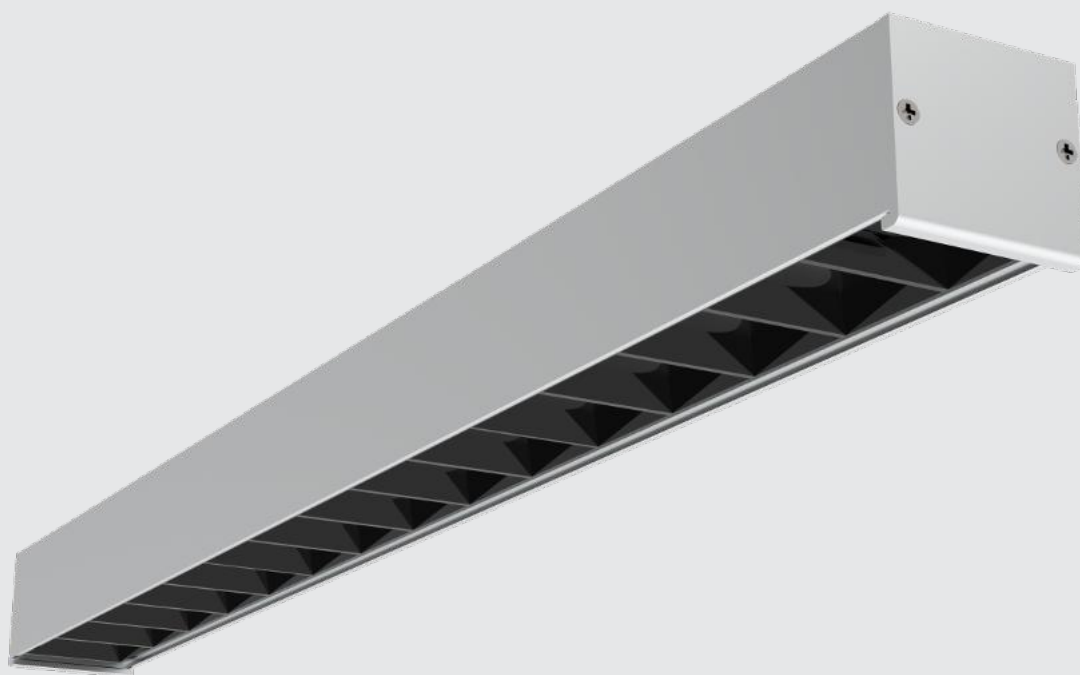

Body Color Available



White



Grey



Black

CCT



3000K



4000K



5700K



Technical Specification

Housing	: Aluminium Extrusion (Powder Coated)
LDA	: Black and Silver Reflector with Clear Lens (132mm)
Beam Angle	: 45°
LED	: Osram Oslon Square 3030
Driver	: Osram / Fulham - 36V DC
Wattage	: 10w/LDA
Lumens	: 70 lumens/Watt
Mounting Type	: Surface
Dimensions	: • Cutout : 35mm • Width : 35mm • Height : 30mm
Option Available	: • Customize length and formation • Dimmable Dali & Analogue • Constant current led and driver

Available Combination





LUMINAR LIGHTING CONTROLS
Architectural Lighting Solutions

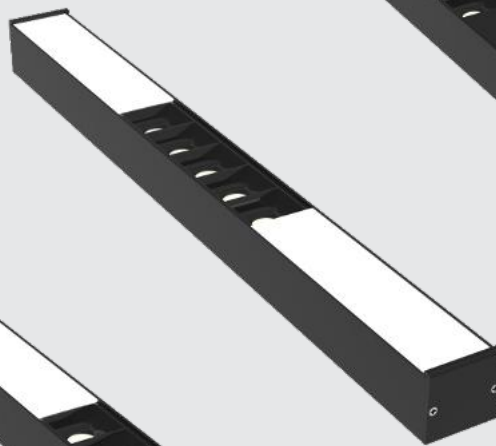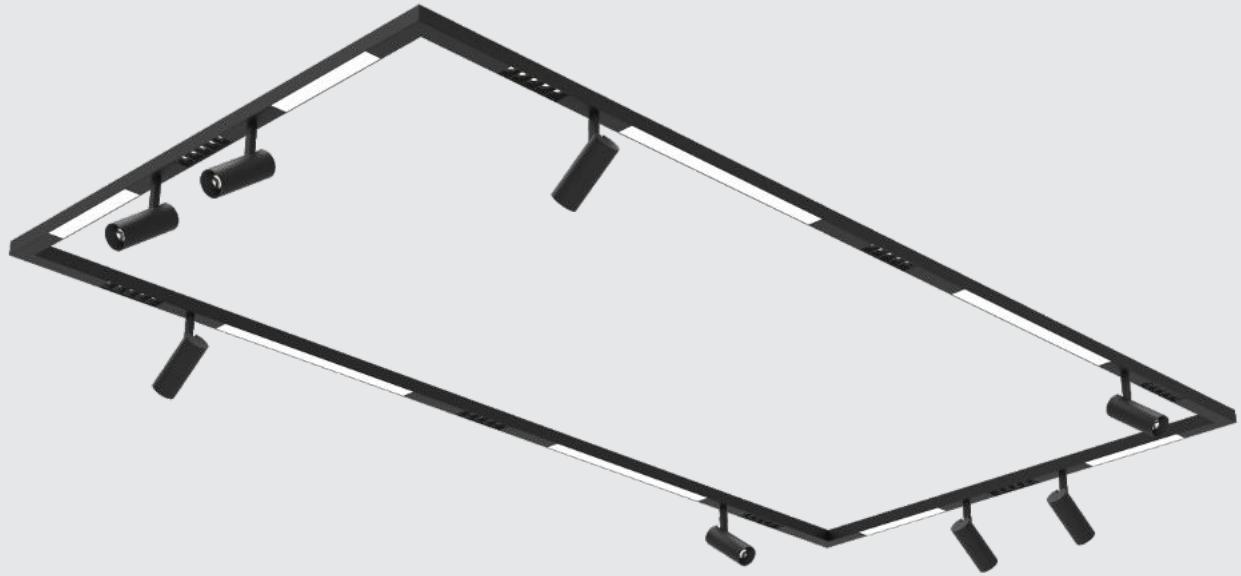


Glint-4530 Laser




LUMINAR LIGHTING CONTROLS
Architectural Lighting Solutions

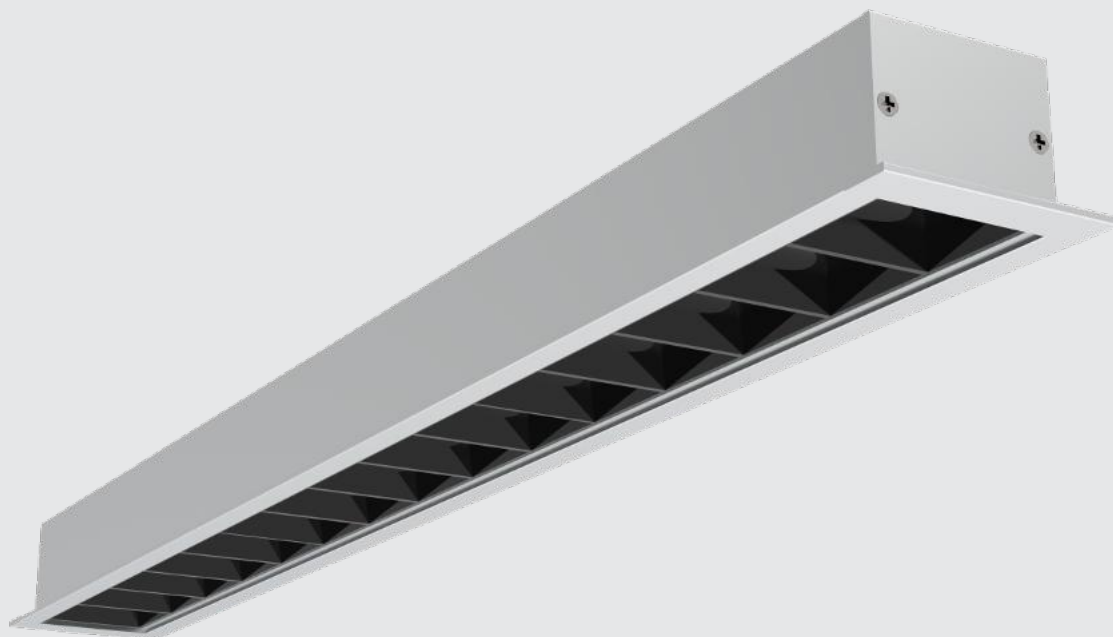

Body Color Available



White



Grey



Black

CCT



3000K



4000K




5700K

Technical Specification

Housing	: Aluminium Extrusion (Powder Coated)
LDA	: Black and Silver Reflector with Clear Lens (132mm)
Beam Angle	: 45°
LED	: Osram Oslon Square 3030
Driver	: Osram / Fulham - 36V DC
Wattage	: 10w/LDA
Lumens	: 70 lumens/Watt
Mounting Type	: Recessed
Dimensions	: • Cutout : 35mm • Width : 45mm • Height : 30mm
Option Available	: • Customize length and formation • Dimmable Dali & Analogue • Constant current led and driver

Accessories


Recessed

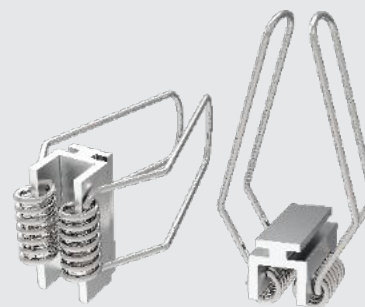

Available Combination




LUMINAR LIGHTING CONTROLS
Architectural Lighting Solutions

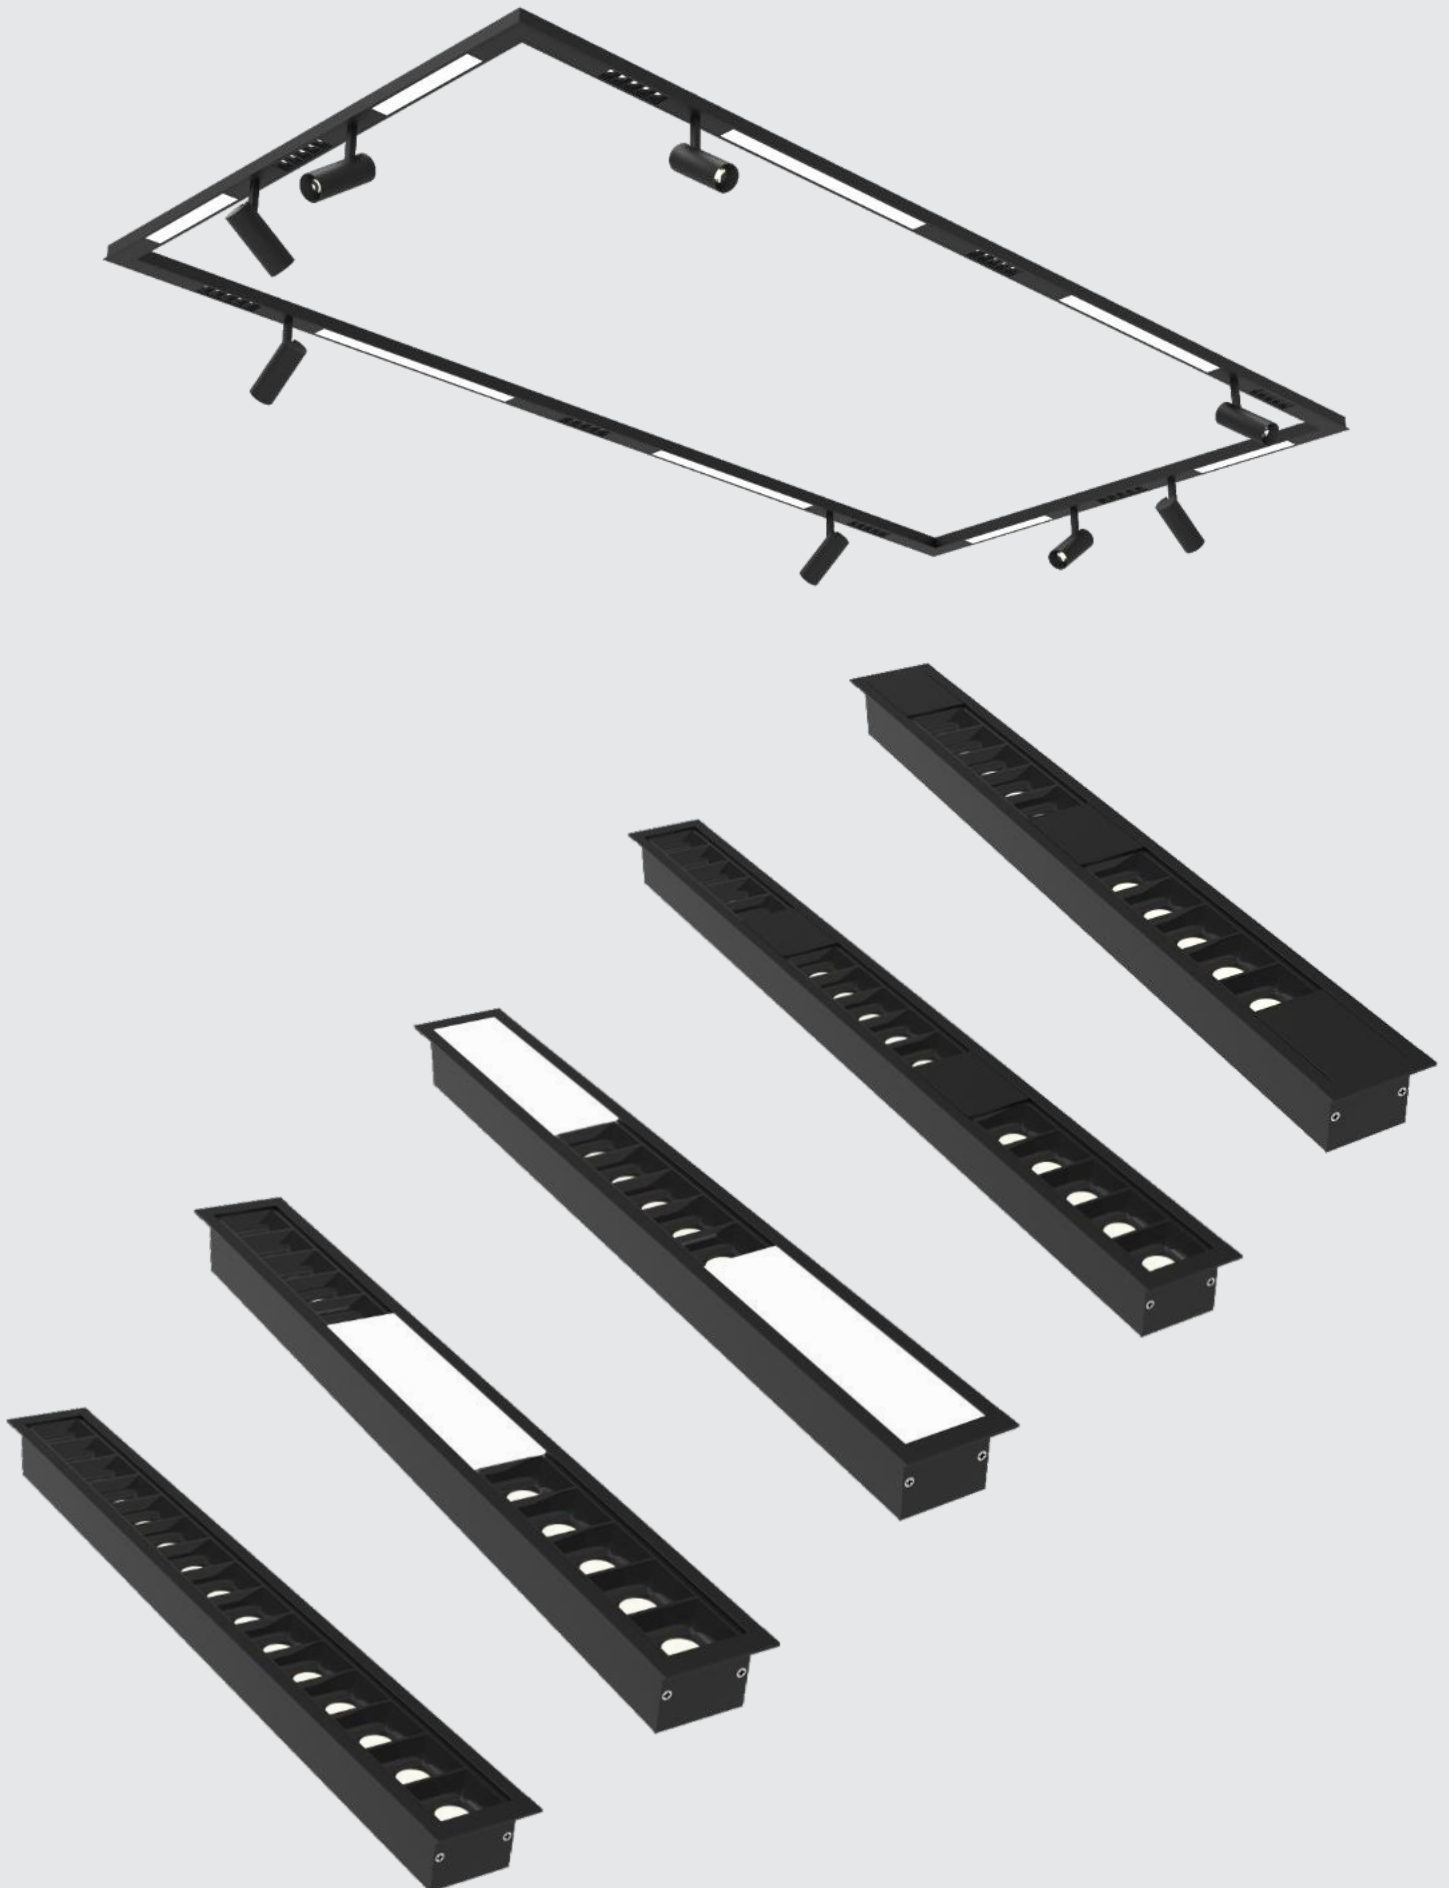


Glint-3580 Laser




LUMINAR LIGHTING CONTROLS
Architectural Lighting Solutions

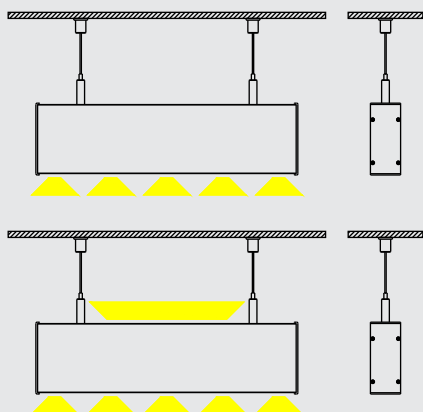

Body Color Available



White



Grey



Black

CCT



3000K



4000K



5700K

Technical Specification

Housing	: Aluminium Extrusion (Powder Coated)
LDA	: Black and Silver Reflector with Clear Lens (132mm)
Beam Angle	: 45°
LED	: Osram Oslon Square 3030
Driver	: Osram / Fulham - 36V DC
Wattage	: 10w/LDA
Lumens	: 70 lumens/Watt
Mounting Type	: Suspended and Suspended updown
Dimensions	: • Width : 35mm • Height : 80mm
Option Available	: • Customize length and formation • Dimmable Dali & Analogue • Constant current led and driver

Accessories


Hanging



Available Combination






LUMINAR LIGHTING CONTROLS
Architectural Lighting Solutions

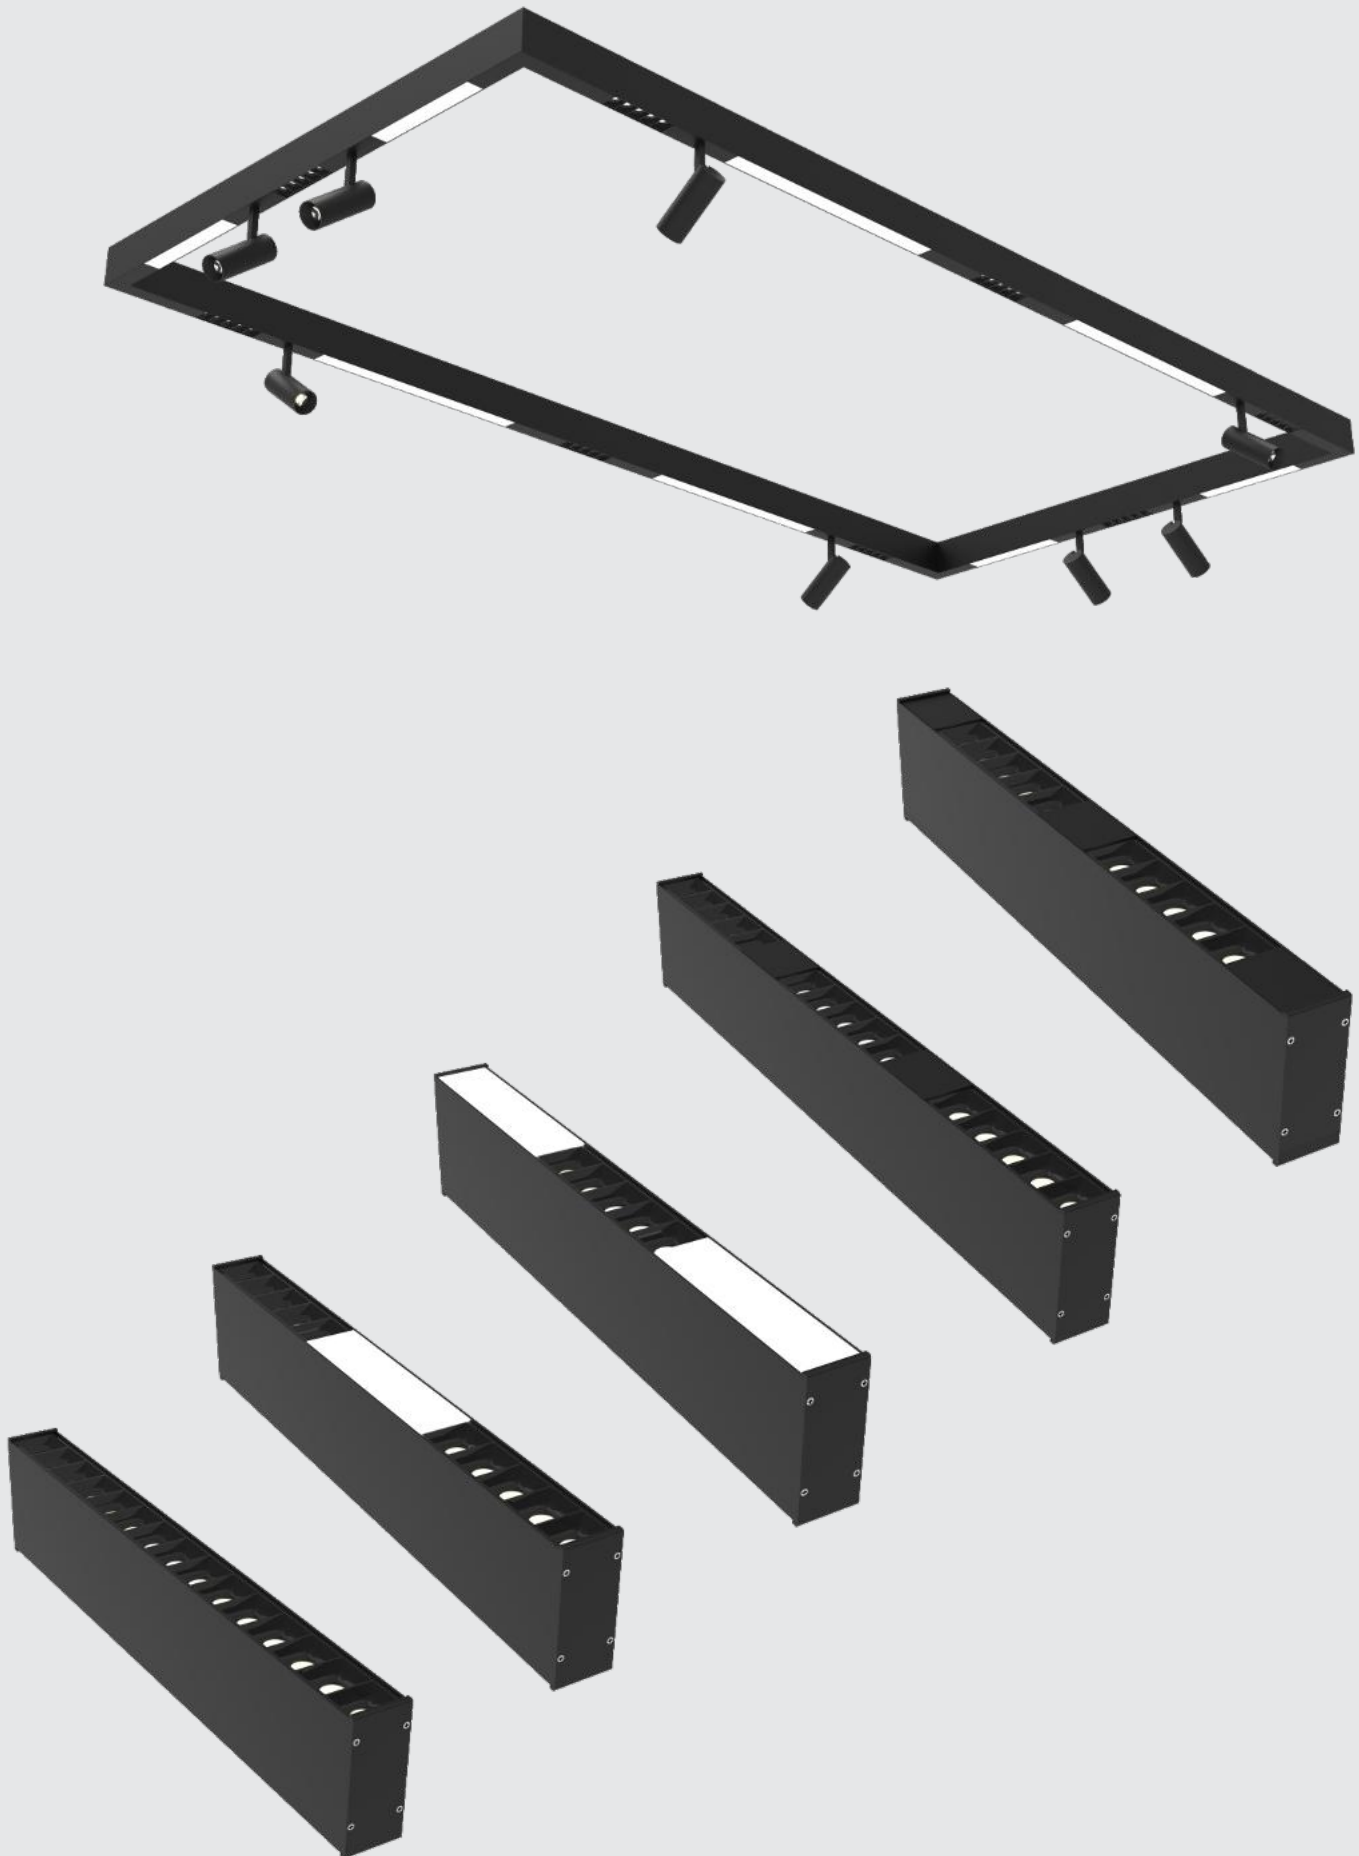




I-PANEL SERIES


Edge-lit Panel

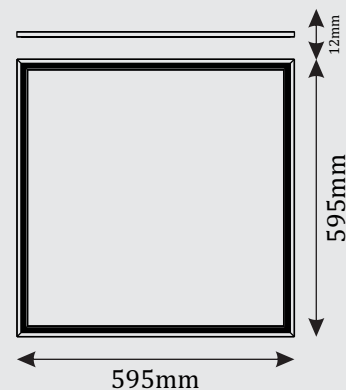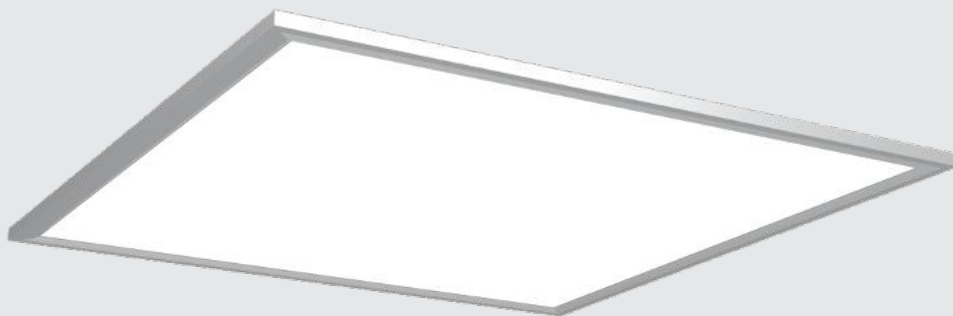


Body Color Available



White



Grey



Black

CCT



3000K






4000K



5700K

Technical Specification

Housing	: Aluminium Extrusion (Powder Coated)
Diffuser	: PMMA
LED	: Bridgelux 2835 SMD
Driver	: Osram / Fulham - 36V DC
Wattage	: 40W
Lumens	: 100 Lumens/Watt
Mounting Type	: Ceiling Mounted
Dimensions	: • Length : 595mm • Width : 595mm • Height : 12mm
Option Available	: • Dimmable Dali & Analogue

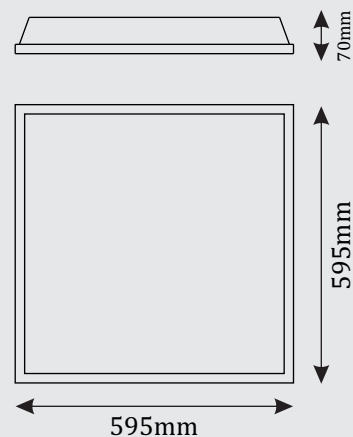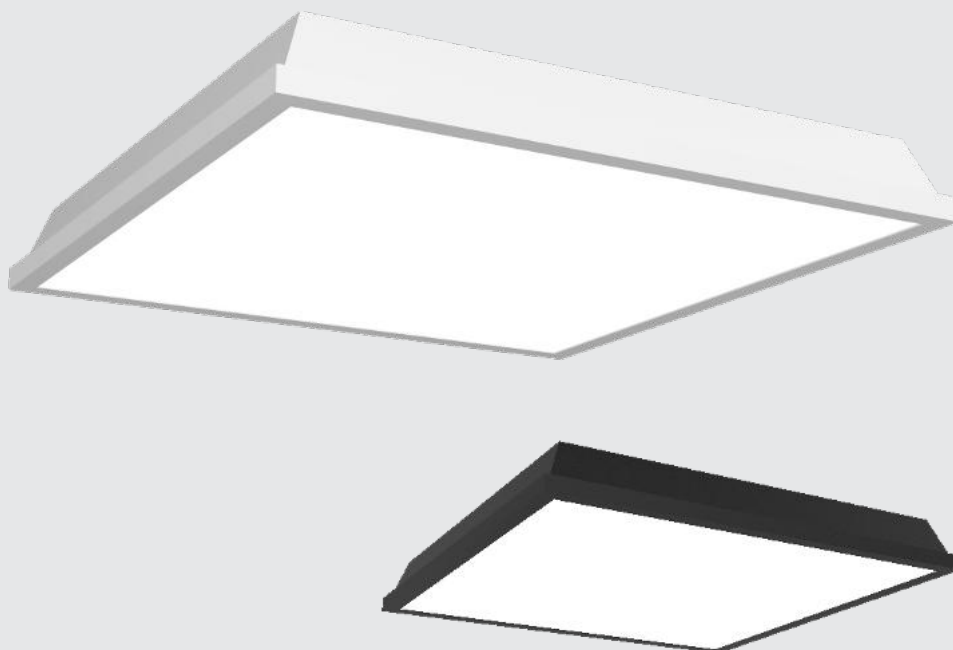

CCT



3000K



4000K




5700K

Technical Specification

Housing	: Aluminium Sheet Moulded (Powder Coated)
Diffuser	: PMMA
LED	: Bridgelux 2835 SMD
Driver	: Osram / Fulham - 36V DC
Wattage	: 40W
Lumens	: 100 Lumens/Watt
Mounting Type	: Recessed
Dimensions	: • Length : 595mm • Width : 595mm • Height : 70mm
Option Available	: • Dimmable Dali & Analogue • Constant current led and driver



CER0 SERIES

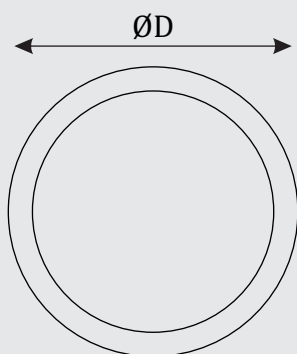

Body Color Available



White



Grey

CCT



3000K



4000K



5700K



Technical Specification

Housing	: Aluminium Extrusion (Powder Coated)
Diffuser	: PMMA
LED	: Bridgelux 2835 SMD
Driver	: Osram / Fulham - 36V DC
Wattage	: 30W, 40W, 55W resp.
Lumens	: 80 Lumens/Watt
Dimensions	: • Cutout : 265mm 415mm 565mm • Dia : 300mm 450mm 600mm • Height : 70mm 70mm 70mm
Features	: • Available : • Hanging ☒ • Surface ☒
Option Available	: • Dimmable Dali & Analogue • Constant current led and driver

Accessories

Hanging




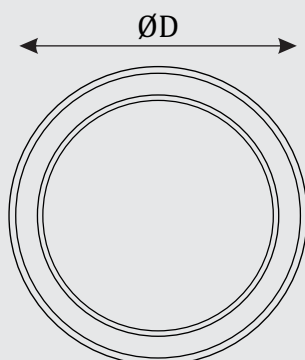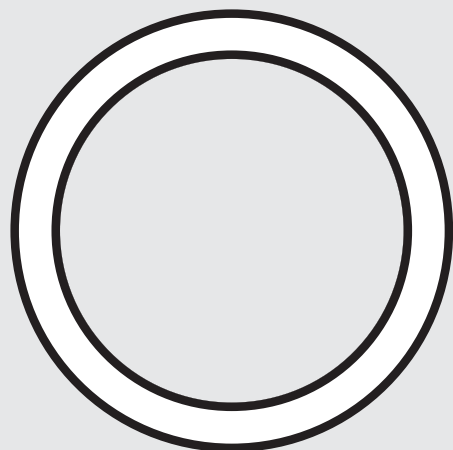

Body Color Available



White



Grey

CCT



3000K



4000K




5700K

Technical Specification

Housing	: Aluminium Extrusion (Powder Coated)
Diffuser	: PMMA
LED	: Bridgelux 2835 SMD
Driver	: Osram / Fulham - 36V DC
Wattage	: 40W
Lumens	: 80 Lumens/Watt
Dimensions	: • Dia : 610mm • Light Window : 42mm • Cutout : 600mm • Height : 35mm ☒
Features	: • Available : • Recessed
Option Available	: • Dimmable Dali & Analogue • Constant current led and driver



LUNA SERIES

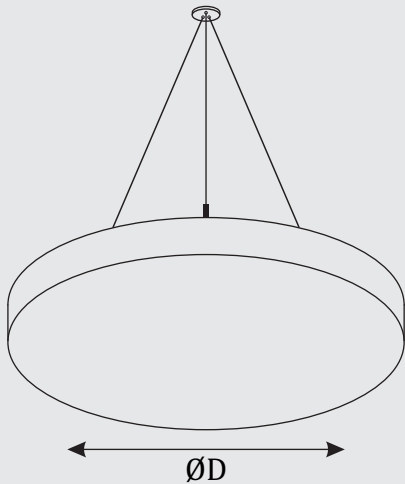

Body Color Available



White



Grey

CCT



3000K



4000K



5700K

Technical Specification

Housing	: Aluminium Extrusion (Powder Coated)
Diffuser	: PMMA
LED	: Bridgelux 2835 SMD
Driver	: Osram / Fulham - 36V DC
Wattage	: 20W, 30W, 40W
Lumens	: 80 Lumens/Watt
Dimensions	: • Cutout : 265mm 415mm 565mm • Dia : 300mm 450mm 600mm • Height : 70mm 70mm 70mm
Features	: • Available : • Hanging ☒
Option Available	: • Customize length • Dimmable Dali & Analogue • Constant current led and driver

Accessories

Hanging






Body Color Available



White



Grey

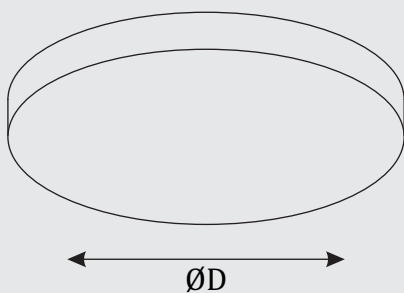

CCT



3000K




4000K



5700K

Technical Specification

Housing	: Aluminium Extrusion (Powder Coated)
Diffuser	: PMMA
LED	: Bridgelux 2835 SMD
Driver	: Osram / Fulham - 36V DC
Wattage	: 20W, 30W, 40W
Lumens	: 80 Lumens/Watt
Dimensions	: • Cutout : 265mm 415mm 565mm • Dia : 300mm 450mm 600mm • Height : 70mm 70mm 70mm
Features	: • Available : • Surface ☒
Option Available	: • Customize length • Dimmable Dali & Analogue • Constant current led and driver

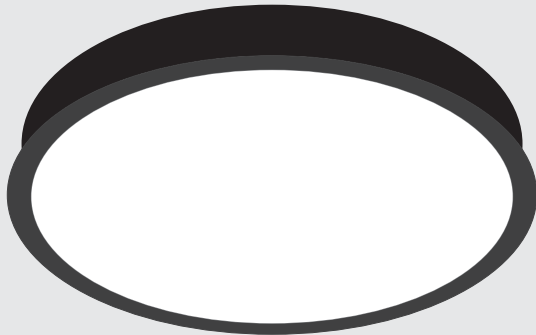


Body Color Available



White



Grey

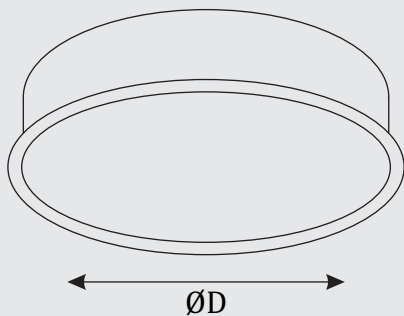

CCT



3000K



4000K



5700K

Technical Specification

Housing	: Aluminium Extrusion (Powder Coated)
Diffuser	: PMMA
LED	: Bridgelux 2835 SMD
Driver	: Osram / Fulham - 36V DC
Wattage	: 20W, 30W, 40W
Lumens	: 80 Lumens/Watt
Dimensions	: • Cutout : 265mm 415mm 565mm • Dia : 300mm 450mm 600mm • Height : 70mm 70mm 70mm
Features	: • Available : • Recessed ☒
Option Available	: • Customize length • Dimmable Dali & Analogue • Constant current led and driver




CUSTOMISED CURVY


Linear Profile Series




Body Color Available



White



Grey



Black

CCT



3000K



4000K




5700K

Technical Specification

Housing	: CRCA - Metal Housing Powder Coated
Diffuser	: ACRYLIC (Asthali Make)
LED	: Bridgelux 2835 SMD
Driver	: Osram / Fulham - 24V DC / 36V DC
Wattage	: 24w/meter
Lumens	: 70 Lumens/Watt
Mounting Type	: Recessed
Dimensions	: • Width : 50mm • Height : 70mm
Option Available	: • Customize length • Dimmable Dali & Analogue • Constant current led and driver

Accessories




C-Clamp

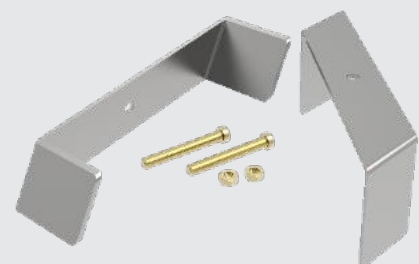


Curvy RC-6535




LUMINAR LIGHTING CONTROLS
Architectural Lighting Solutions

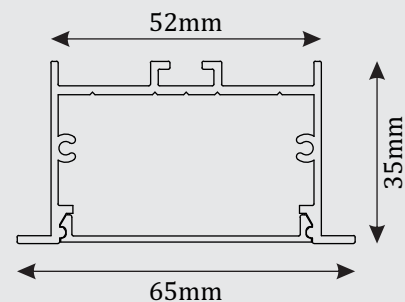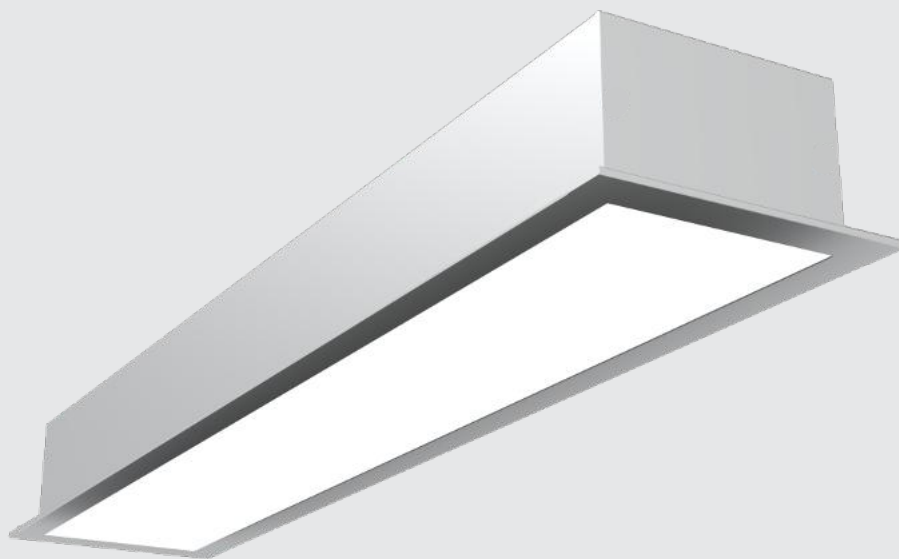


Body Color Available



White



Grey



Black

CCT



3000K



4000K



5700K

Technical Specification

Housing	: Aluminium Extrusion (Powder Coated)
Diffuser	: PMMA
LED	: Bridgelux 2835 SMD
Driver	: Osram / Fulham - 36V DC
Wattage	: 24w/meter
Lumens	: 100 Lumens/Watt
Mounting Type	: Recessed
Dimensions	: • Cutout : 52mm • Width : 65mm • Height : 35mm
Option Available	: • Customize length • Dimmable Dali & Analogue • Constant current led and driver


Accessories

C-Clamp







Body Color Available



White



Grey



Black

CCT



3000K



4000K



5700K

Technical Specification

Housing	: CRCA - Metal Housing
Diffuser	: ACRYLIC (Asthali Make)
LED	: Bridgelux 2835 SMD
Driver	: Osram / Fulham - 36V DC
Wattage	: 24w/meter
Lumens	: 70 Lumens/Watt
Mounting Type	: Recessed
Dimensions	: • Cutout : 75mm (Without Trim) • Width : 75mm • Height : 50mm
Option Available	: • Customize length • Dimmable Dali & Analogue • Constant current led and driver

Accessories





C-Clamp





CUSTOMISED LINEARS

(Surface, Recessed, Suspended)

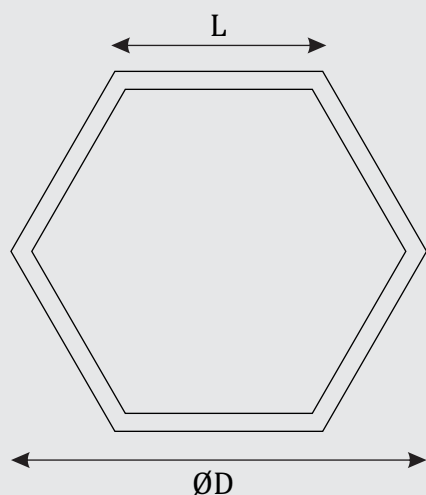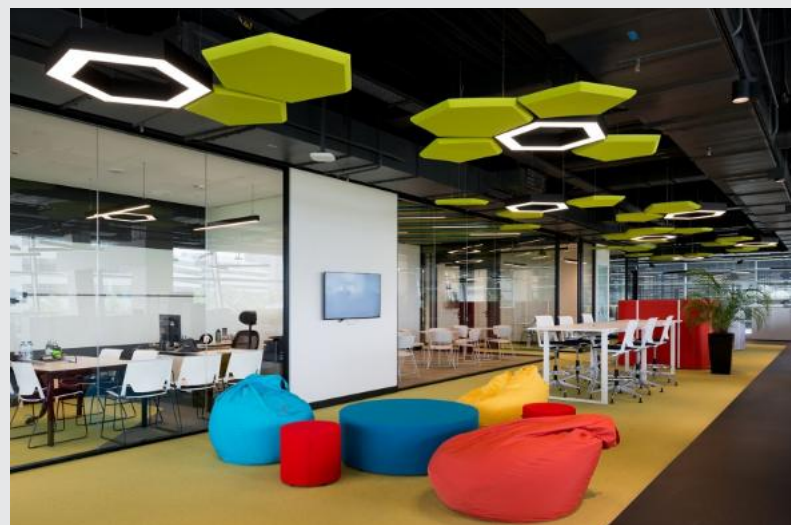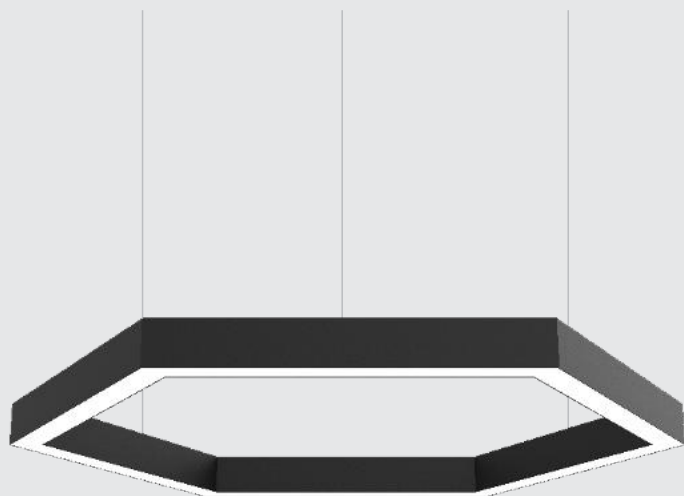

Recessed



Surface

CCT



3000K






4000K




5700K

Technical Specification

Housing	: Aluminium Extrusion (Powder Coated)
Diffuser	: PMMA
LED	: Bridgelux 2835 SMD
Driver	: Osram / Fulham - 36V DC
Wattage	: 15w/meter
Lumens	: 80 Lumens/Watt
Features	: • Available : • Hanging ☒ • Surface ☒ • Recessed ☒ • 35 Series ☒ • 52 Series ☒ • 75 Series ☒
Option Available	: • Customize length • Dimmable Dali & Analogue • Constant current led and driver

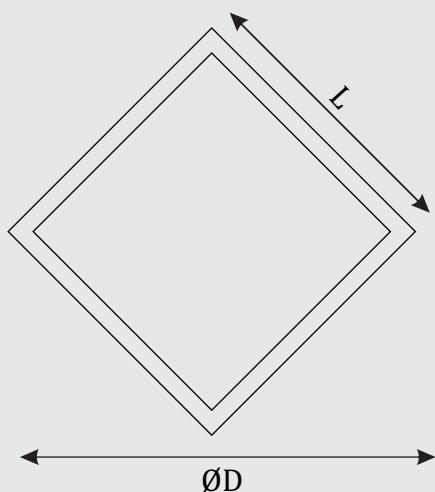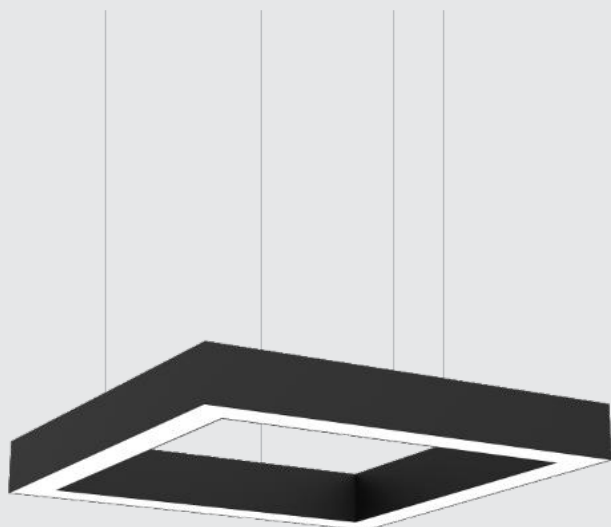

Recessed



Surface

CCT



3000K






4000K




5700K

Technical Specification

Housing	: Aluminium Extrusion (Powder Coated)
Diffuser	: PMMA
LED	: Bridgelux 2835 SMD
Driver	: Osram / Fulham - 36V DC
Wattage	: 15w/meter
Lumens	: 80 Lumens/Watt
Features	: • Available : • Hanging ☒ • Surface ☒ • Recessed ☒ • 35 Series ☒ • 52 Series ☒ • 75 Series ☒
Option Available	: • Customize length • Dimmable Dali & Analogue • Constant current led and driver

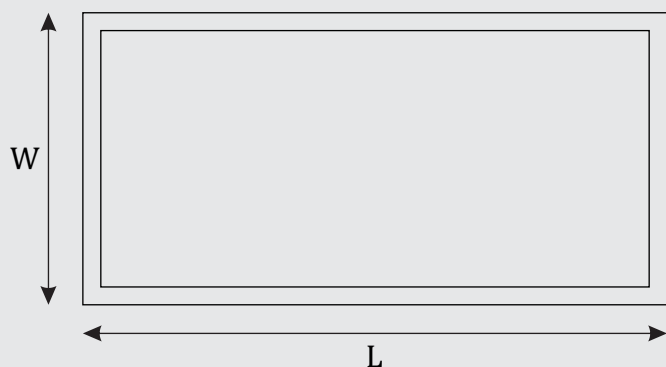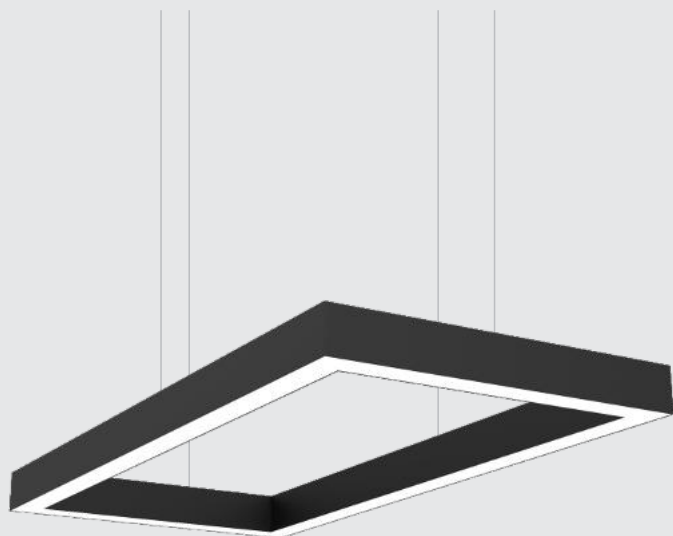

Recessed



Surface

CCT



3000K







4000K



5700K

Technical Specification

Housing	: Aluminium Extrusion (Powder Coated)
Diffuser	: PMMA
LED	: Bridgelux 2835 SMD
Driver	: Osram / Fulham - 36V DC
Wattage	: 15w/meter
Lumens	: 80 Lumens/Watt
Features	: • Available : • Hanging ☒ • Surface ☒ • Recessed ☒ • 35 Series ☒ • 52 Series ☒ • 75 Series ☒
Option Available	: • Customize length • Dimmable Dali & Analogue • Constant current led and driver

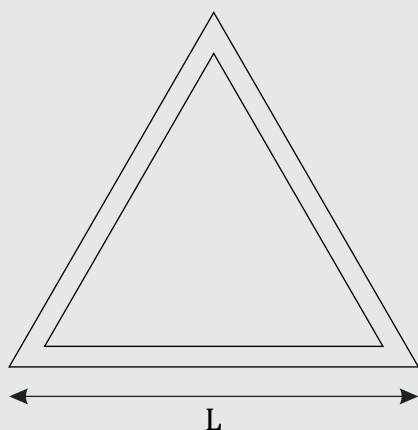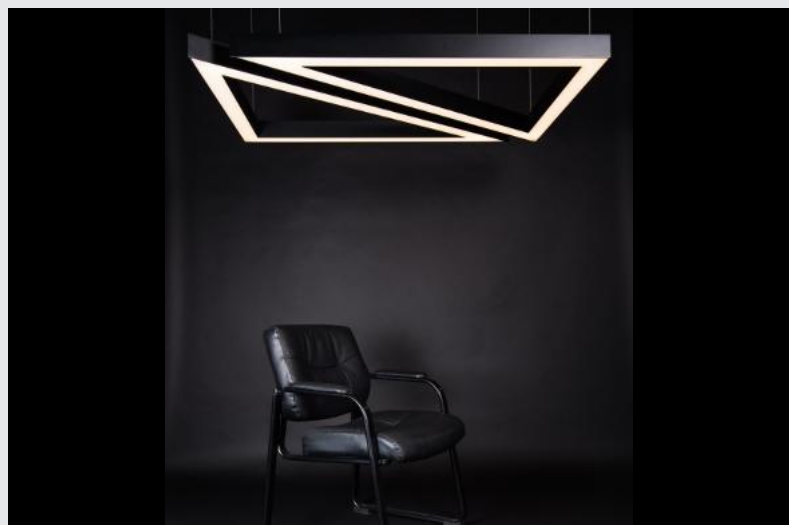

CCT



3000K






4000K



5700K

Technical Specification

Housing	: Aluminium Extrusion (Powder Coated)
Diffuser	: PMMA
LED	: Bridgelux 2835 SMD
Driver	: Osram / Fulham - 36V DC
Wattage	: 15w/meter
Lumens	: 80 Lumens/Watt
Features	: • Available : • Hanging ☒ • Surface ☒ • Recessed ☒ • 35 Series ☒ • 52 Series ☒ • 75 Series ☒
Option Available	: • Customize length • Dimmable Dali & Analogue • Constant current led and driver

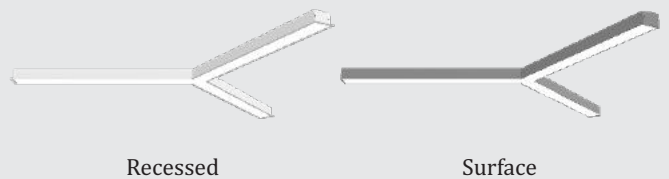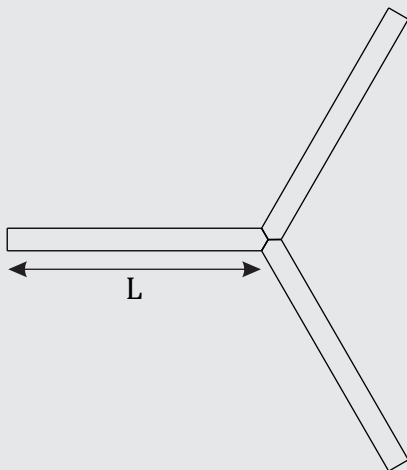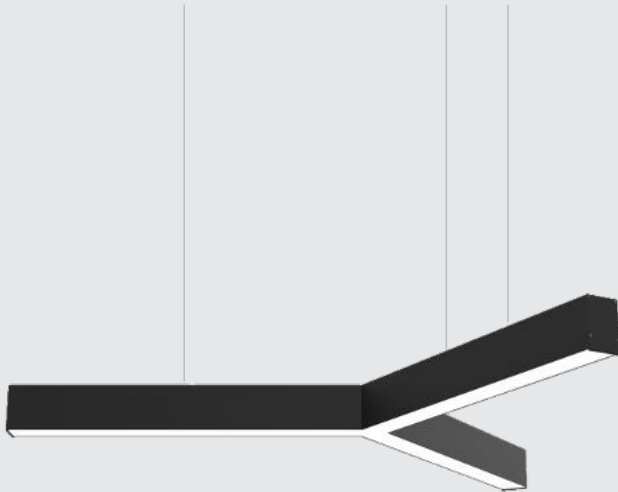

CCT



3000K



4000K



5700K

Technical Specification

Housing	: Aluminium Extrusion (Powder Coated)
Diffuser	: PMMA
LED	: Bridgelux 2835 SMD
Driver	: Osram / Fulham - 36V DC
Wattage	: 15w/meter
Lumens	: 80 Lumens/Watt
Features	: • Available : • Hanging ☒ • Surface ☒ • Recessed ☒ • 35 Series ☒ • 52 Series ☒ • 75 Series ☒
Option Available	: • Customize length • Dimmable Dali & Analogue • Constant current led and driver







LUMINAR LIGHTING CONTROLS

Architectural Lighting Solutions

**Gala No. 1 & 2 Ground Floor,
Priya Industrial Estate No. 1,
Waliv Vasai (East) – 401208.**

Email.: luminarlightingcontrols01@gmail.com

Suresh Prajapati : +91 99205 70013

Hitendra Parab : +91 99309 83314

Powered by

